



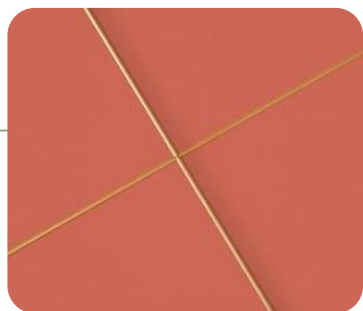


# FOCUS DT

## תקרה נסתרת

תקרה אקוסטית המשלבת פרופיל אלומיניום דקורטיבי מובנה. שימוש בקונסטרוקציה נסתרת ופרופיל אלומיניום בין הפנלים ליצירת עיצוב דומיננטי ואלגנטי. מערכת מודולרית ופריקה המאפשרת שילוב אלמנטים טכניים בקלות. האריחים בעובי 20 מ"מ, במשקל כולל פרופילציה 3-4 ק"ג/מ"ר.

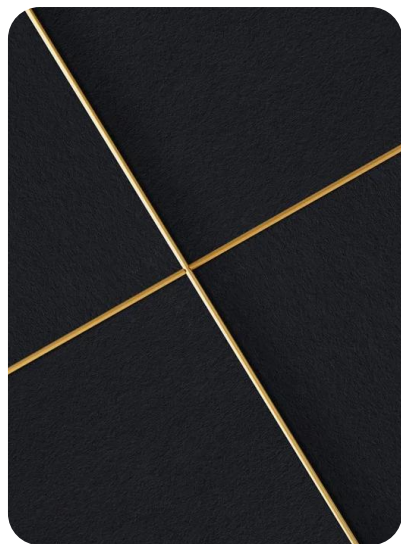


30x120	60x240	60x200	60x180	30x180	60x160	120x120	60x120	61x61	60x60		
											T15
							•		•		T24
											פיין ליין

\*יש לבדוק זמינות מלאי

THK mm	o.d.s mm	Practical sound absorption coefficient						aw	Sound absorption class
		125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz		
20	200	0.60	0.85	1.00	0.90	1.00	1.00	1.00	A

THK mm	o.d.s mm	NRC
20	200	0.95

Focus DT 20 mm, 200 mm O.D.S. —  
O.D.S. = Overall Depth of System

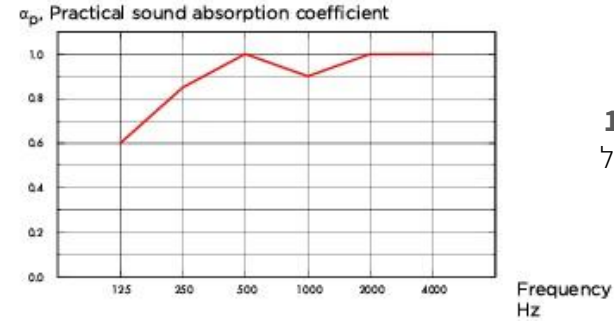

**בליעת רעש  $\alpha_w$  - 1.00**  
מקדם בליעת קול משוקלל  
לפי תקן אירופאי



**עמידות בלחות**  
עד 95% לחות יחסית



**מאושר לשימוש**  
ע"י האיגוד השוודי לחקר  
האסטמה והאלרגיה



**VOC תרכובות אורגניות נדיפות**  
דרגה M1 המציינת את האיכות הגבוהה  
ביותר ואת הפליטה הנמוכה ביותר של  
חלקיקים וכימיקלים מזיקים



**תכולת חומר ממוחזר**  
מעל 70%



**התקנה**  
על גבי פרופיל מסוג:  
Ecophon connect HD T24





**ניקוי האריחים**  
באמצעות מטלית לחה ושואב אבק




**תגובות בשריפה**  
ע"פ ת"י A2-s1, d0 - 755




**החזר אור**  
85%

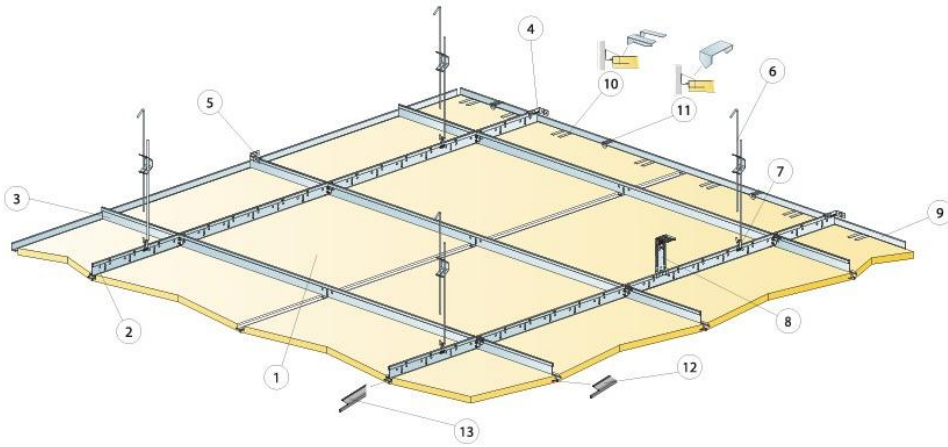

DT trim



See Quantity specification



Edge meeting with two DT trims,  
L=600 mm & 596 mm

Size, mm	Max live load (N)	Min load bearing capacity (N)
600x600x20	50	160

Live load/load bearing capacity.

**Quantity specification (excl. wastage)**

	Size, mm
<b>600x600</b>	
1 Focus DT	2, 8/m <sup>2</sup>
2 Connect T24 Main Runner PL, installed at 1200 mm centres	0,9/m <sup>2</sup>
3 Connect T24 Cross Tee PL, L=1200 mm, installed at 600 mm centres	1,7/m <sup>2</sup>
4 Connect Wall Bracket, fixed 1200mm centres for Main runner	2/suspended row of Main runner
5 Connect Wall Bracket, fixed 1200mm centres for Cross tee	1/row of cross tee
6 Connect Adjustable Hanger, installed at 1200 mm centres (max. distance from wall 600 mm)	0,7/m <sup>2</sup>
7 Connect Hanger Clip (not to be used in swimming hall environments)	0,7/m <sup>2</sup>
8 Alt. Connect Adjust direct bracket, installed at 1200 mm centres	0,7/m <sup>2</sup>
9 Connect Angle trim 15/22, fixed at 300 mm centres	as required
10 Connect Support clip Dg20	1/300-400 mm with 1 supporting edge
11 Connect Perimeter tile clip	1/perimeter tile with 1 supporting edge
12 Connect Dt trim, L=600	1,7/m <sup>2</sup>
13 Connect Dt trim, L=596	1,7/m <sup>2</sup>

Δ Min. overall depth of system, with adjustable hanger: 125 mm, with adjust direct bracket: 85mm

δ Min. demounting depth: 35 mm

For luminaire integration in panels use Connect Bridging

as required



White Frost



Deep Sea



Sage Mist



Morning Rain



Scallop Shells



Spring Leaf



Pine Green



Wet Sand



Silent Steam



Dark Diamond



Cloudy Day



Volcanic Ash



Silver Stone



Silk Slate



Dark Chestnut



Basalt Rock