




AKUSTO™ WALL C

חיפוי קיר

חיפוי קיר אקוסטי עם קונסטרוקציה נסתרת וחיבורים מושלמים בין הפאנלים.


עובי 40 מ"מ, משקל כ-4 ק"ג למ"ר, מידות אריח – 270X60

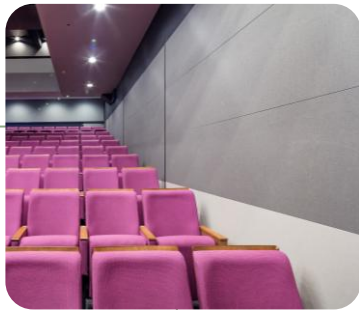

	THK mm	o.d.s. mm	Practical sound absorption coefficient						AW	Sound absorption class
			125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz		
Akutex FT	40	45	0.20	0.70	1.00	1.00	1.00	1.00	1.00	A
Texona	40	45	0.20	0.70	1.00	1.00	1.00	1.00	1.00	A
Super G	40	45	0.15	0.70	1.00	1.00	1.00	1.00	0.95	A

	THK mm			
Texona	40	45	0.95	
Super G	40	45	0.95	0.96

Akusto Wall C Akutex FT 40 mm, 45 mm o.d.s.
 Akusto Wall C Texona 40 mm, 45 mm o.d.s. —
 Akusto Wall C Super G 40 mm, 45 mm o.d.s. ---
 o.d.s = overall depth of system

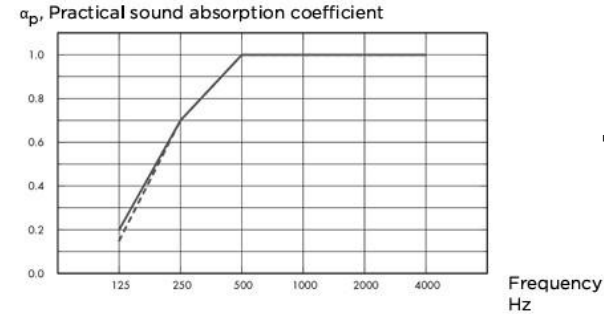

בליעת רעש α_w - 1.00
 מקדם בליעת קול משוקלל
 לפי תקן אירופאי



עמידות בלחות

עד 70% לחות יחסית RH ב-25°C
 מבלי לשקוע ולהתקלף ע"פ תקן
 ISO 4611



מאושר לשימוש

ע"י האיגוד השוודי לחקר
 האסטמה והאלרגיה



VOC תרכובות אורגניות נדיפות

דרגה M1 המציינת את האיכות הגבוהה
 ביותר ואת הפליטה הנמוכה ביותר של
 חלקיקים וכימיקלים מזיקים



תכולת חומר ממוחזר

100%



התקנה

תבוצע באמצעות מערכת פרופילים תוצרת
 Ecophon המסופקת עם הלוחות. המערכת
 כוללת את האלמנטים הדרושים שהם, פרופיל
 T24, U עליון ותחתון ופרופיל חיבור לקיר.



ניקוי האריחים

באמצעות שואב אבק




תגובות בשריפה

ע"פ ת"י 755 - s1, d0 - A2




החזר אור


בהתאם לצבע
 הנבחר

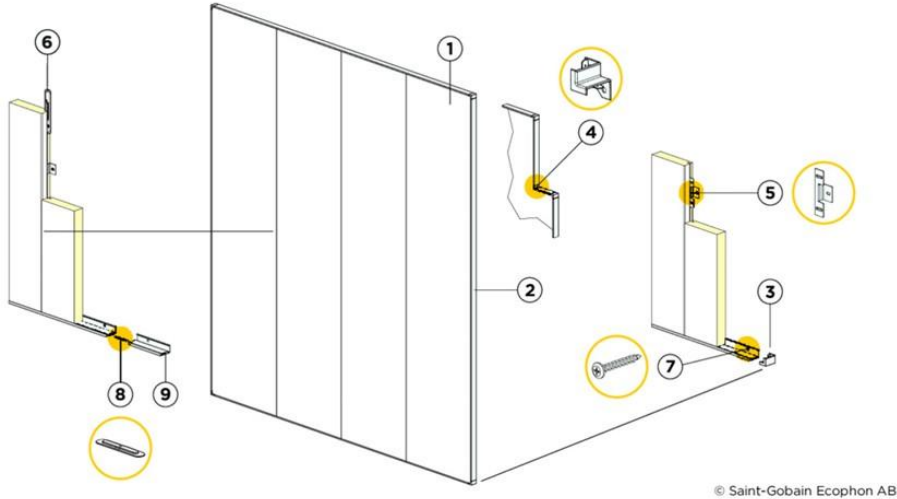


© Saint-Gobain Ecophon AB

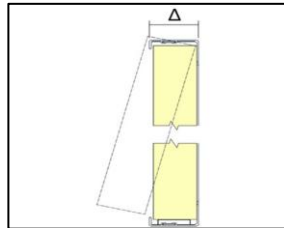

See Quantity specification

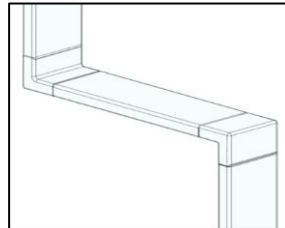

Thinline system with Connect Thinline Internal Corner.

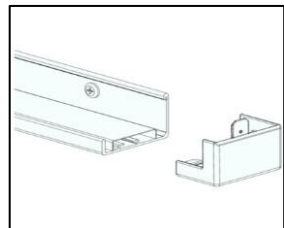

Thinline system detail

Size, mm	Max live load (N)	Min load bearing capacity (N)
2700x600x40	0	-

Live load/load bearing capacity

Quantity specification (excl. wastage)

	Size, mm
	2700x600
1 Akusto Wall C	0, 62/m ²
2 Connect Thinline Profile, L=2658 mm	as required
3 Connect Thinline Ext. Corner	as required
4 Connect Thinline Int. Corner	as required
5 Connect Fixing Plate installed 3 per panel length	as required
6 Connect Spline	as required
7 Installation screw, (select fastener according to wall material)	as required
8 Connect Thinline Splice. used to extend Thinline profiles where needed.	as required
9 Connect Thinline Space Bar, L=2550 mm	as required
Notes	-
Δ Overall depth of system: 45 mm	

Texona



Winter White



Stone Grey



Silver Lining



Thunder Grey



Oat Beige



Deep Forest



Linden Green



Midnight Sky



Ice Blue



Autumn Berry



Heathland Rose



Cloudy Pink



Golden Sand



Shadow Black