

RAW

WILD

WALL

RAW - Born from the wild - where raw meets refined is a large-format embossed wall tile, inspired by a unique zebra pattern, crafted with precise pressing to create a rich, dynamic texture that adds depth and presence to any space.



SIZES

1150x2750mm (45.28x108.27")

THICKNESS

10mm (0.39")

MOQ

3 Units




HOW TO PLACE AN ORDER

RAW offers versatile possibilities for shaping your space. As you plan your layout, take a moment to reflect on a few guiding questions to help refine your design.

Please note that the tiles cannot be cut, so your layout must be planned using full tiles only. Accurate planning will ensure a seamless and visually pleasing result.


Please note the minimum order quantity:

Minimum order of 3 units per color.




Select the internal layout according to the available options

PAGE 3



Choose your desired color from our color palette – printing option available

PAGE 4



Ensure the wall dimensions meet the required specifications


PAGE 5

GEOMETRIC

MODELS



SUGGESTED PATTERNS

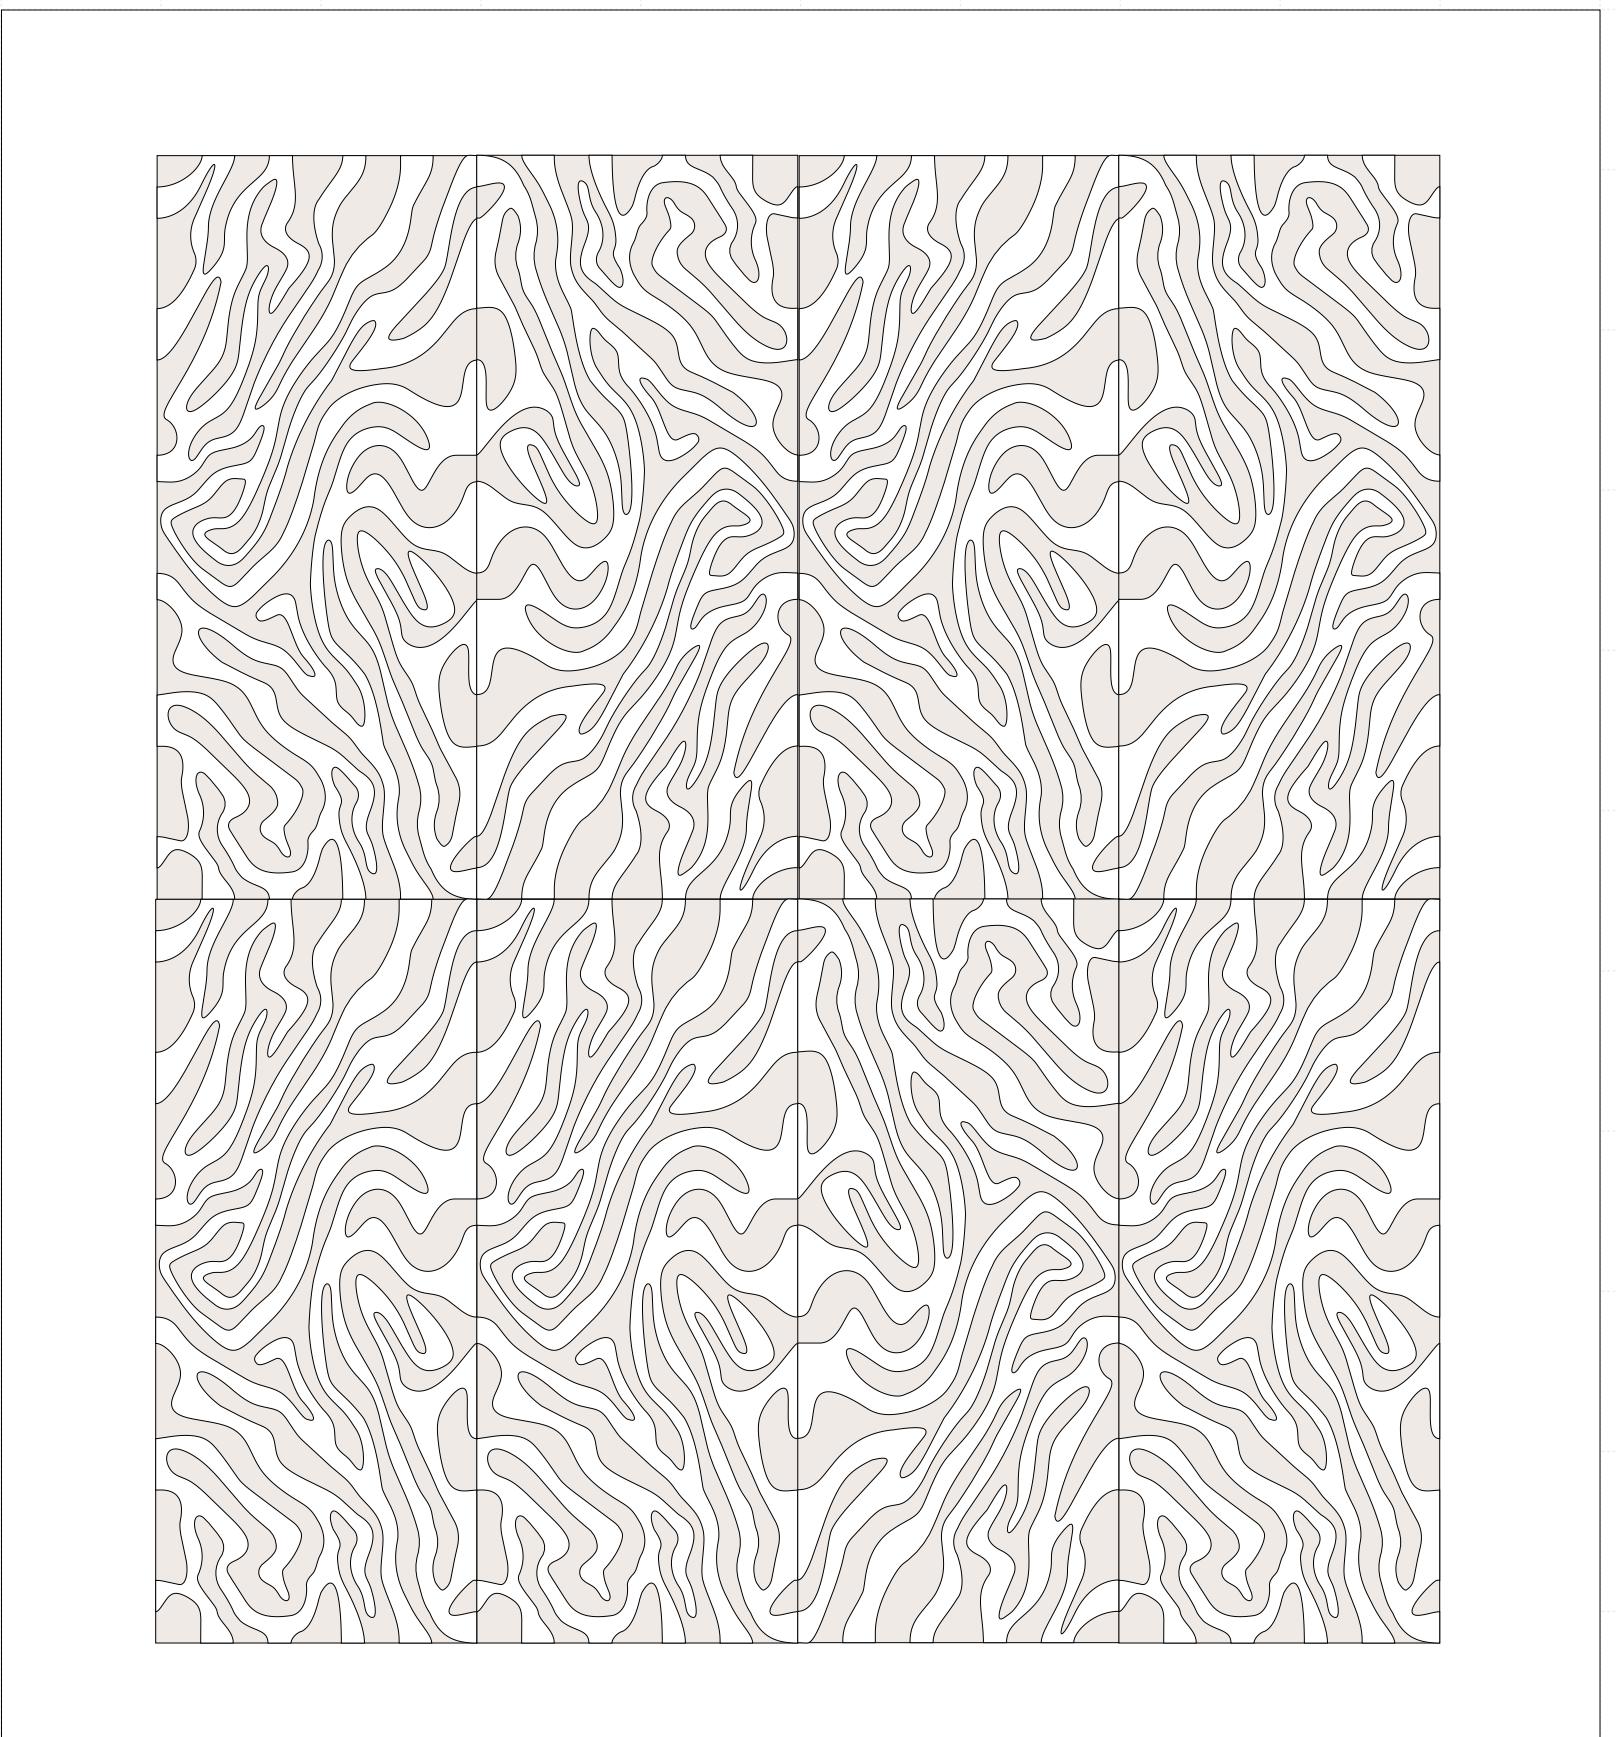

COLORS

echoshape panels are crafted from 12mm PET felt, serving as the core material in our acoustic solutions. Available in a curated range of colors, these panels are designed to enhance both the visual and acoustic qualities of any space.


Choose from subtle neutrals for a seamless look, or introduce bold tones to create striking contrasts. Due to the nature of the PET felt manufacturing process, a soft heathered texture may appear, blending multiple shades within each panel. As a result, slight color variations between units are natural and reflect the sustainable, recycled origin of the material.

Please note: colors may appear differently on screens or in print. For accurate color matching, we recommend requesting a physical sample.




SPECIFICATIONS

| | | |
|----------------------|---|--|
| MANUFACTURED FROM | Panels | |
| COMPOSITION | 100% Polyester (PET) | |
| SUSTAINABILITY | 70% Recycled plastic bottles | |
| APPLICATION | Wall tiles | |
| FIRE RATING | EN13501-1 B S-1 d0 ASTM E-84 - Class A | |
| SIZE | 1150x2750mm (45.28x108.27") | |
| THICKNESS | 10mm (0.39"), TOLERANCE ±7% | |
| INSTALLATION | Gluing | |
| ACOUSTIC RESULTS | Measurement results Echoshape mounted at an airgap of 0 mm Measurement results Echoshape mounted at an airgap of 50 mm Measurement results Echoshape mounted at an airgap of 200 mm | aw 0.25 / NRC 0.30 aw 0.55 / NRC 0.65 aw 0.85 / NRC 0.80 |
| ACOUSTIC CERTIFICATE | ISO 354:2003 EN ISO 22654:1997 ASTM C423-17 | |
| VOC | According to EN ISO 16000-9 Standard: A+ | |
| CARE | Indoor use only. Clean with a damp cloth or vacuum. For spills, blot, immediately use water with a soft cloth, and if needed, mild detergent. Dry while still wet. For stubborn stains, try water first, then mild detergent. | |

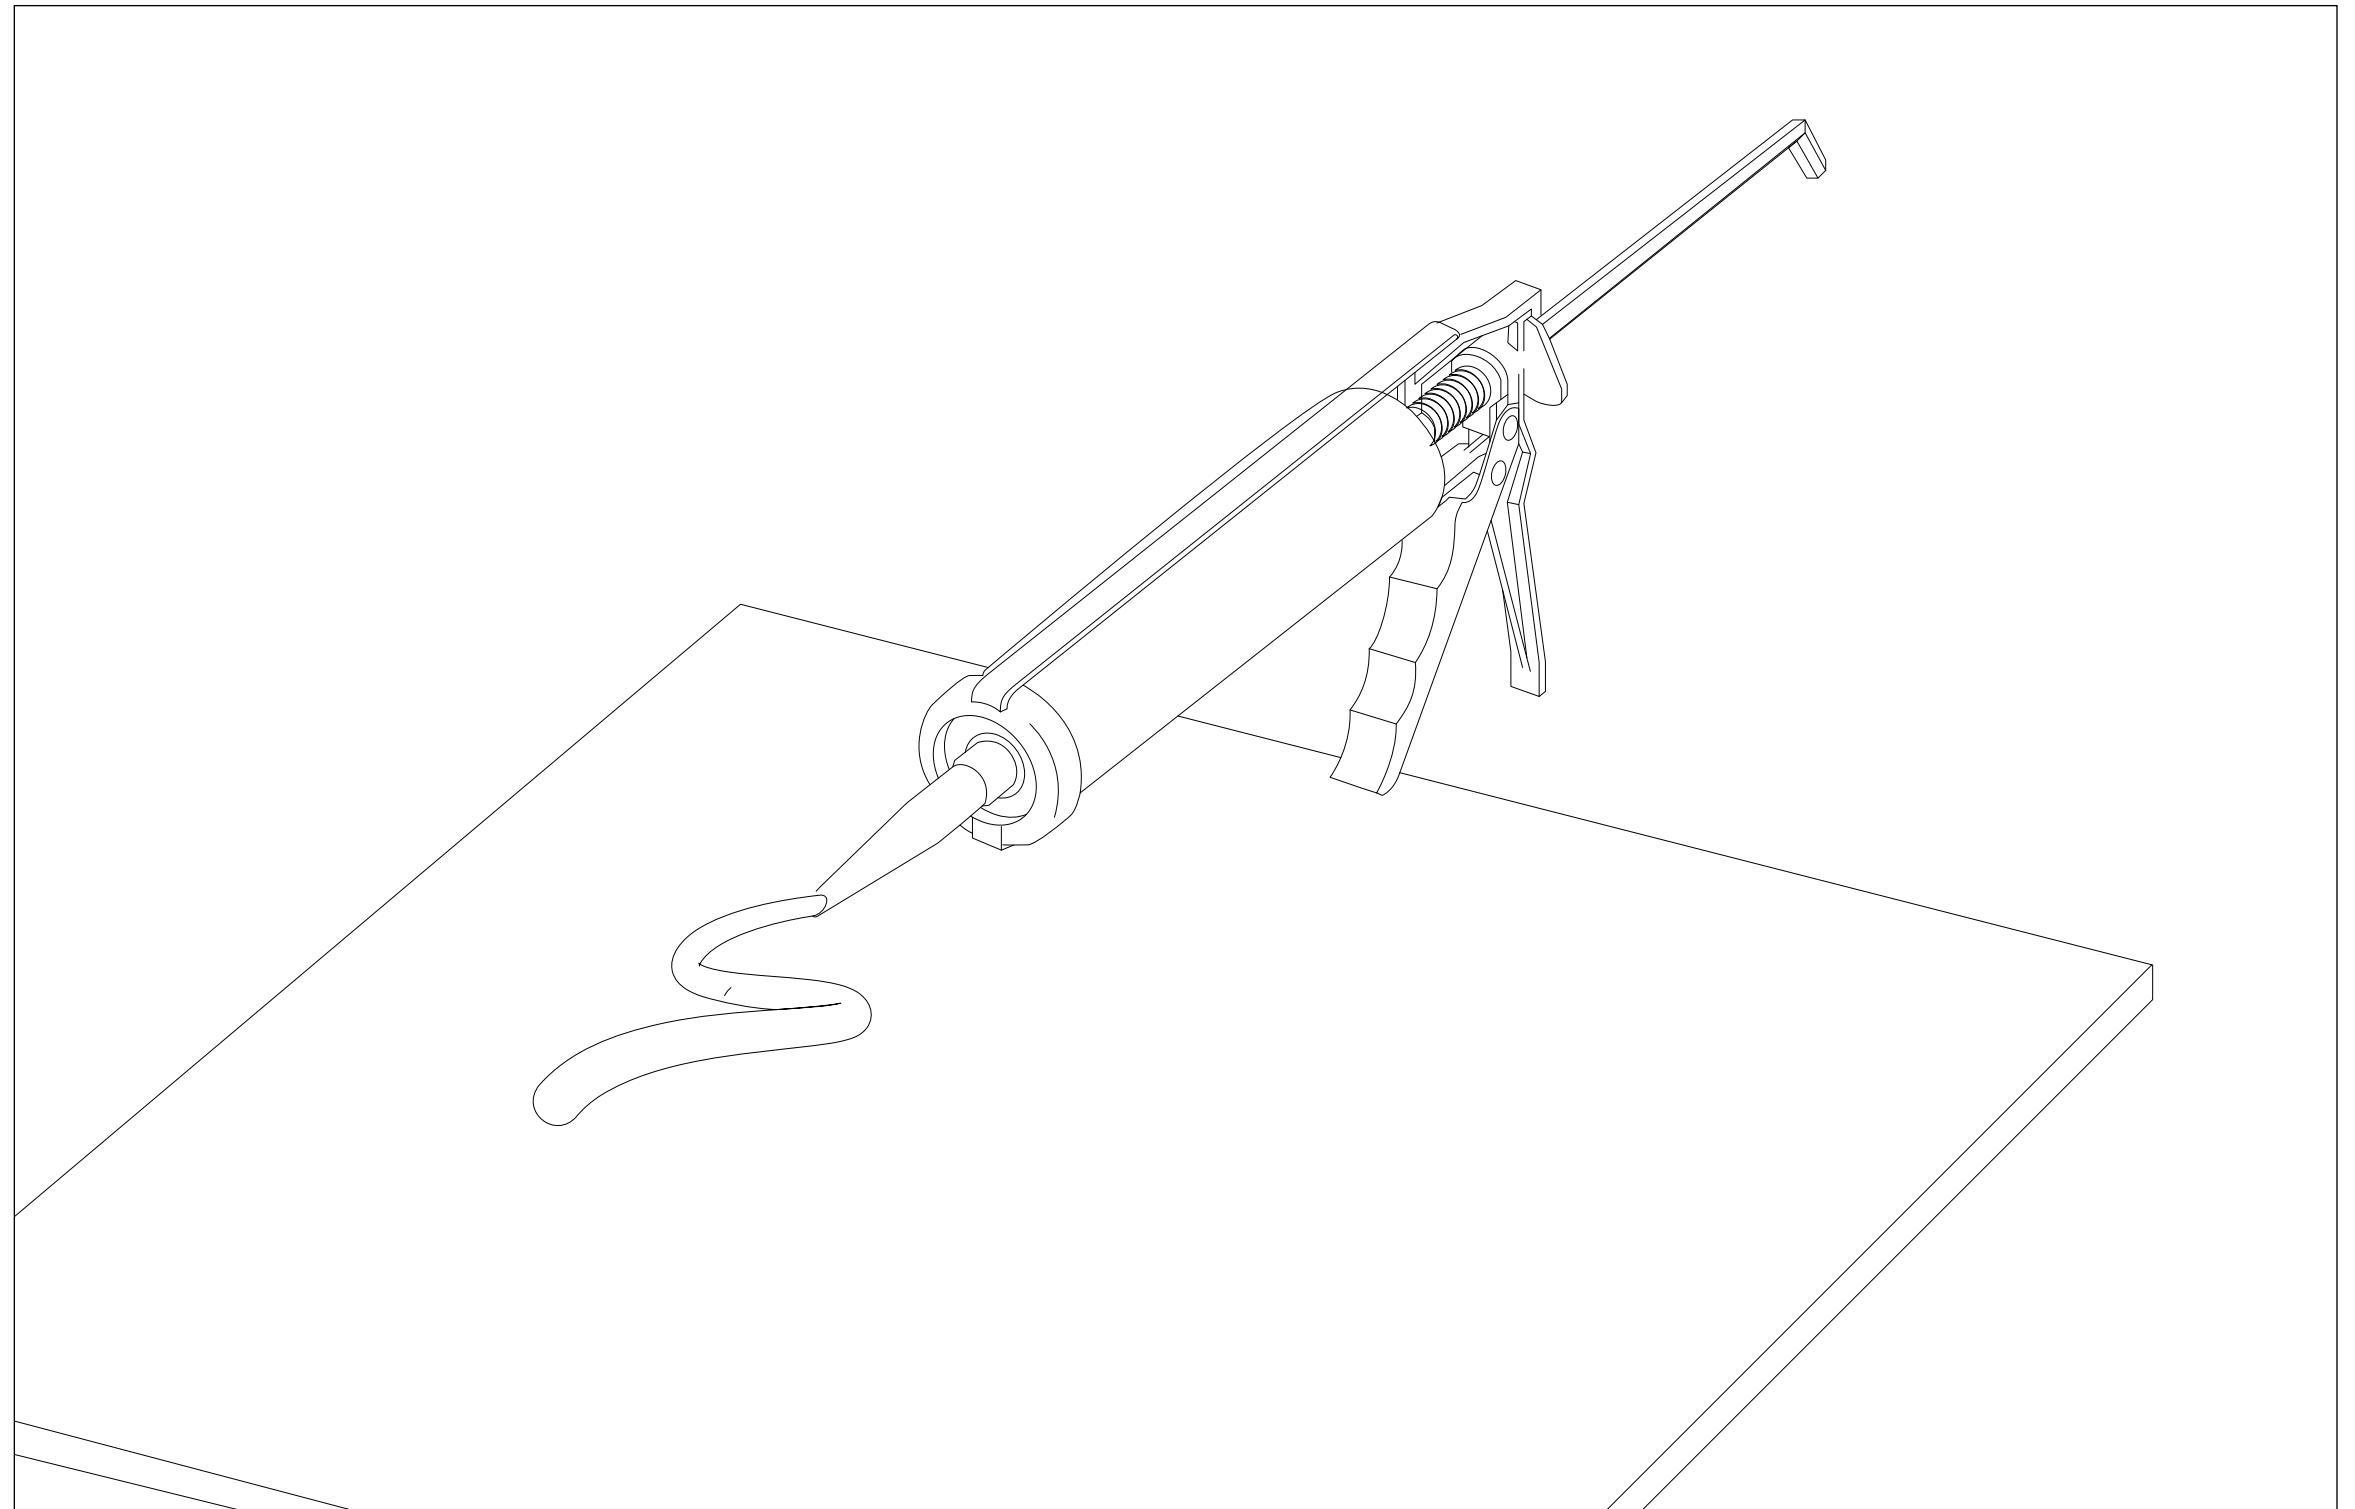

1

Apply strips of construction adhesive to the back of the Raw tile.

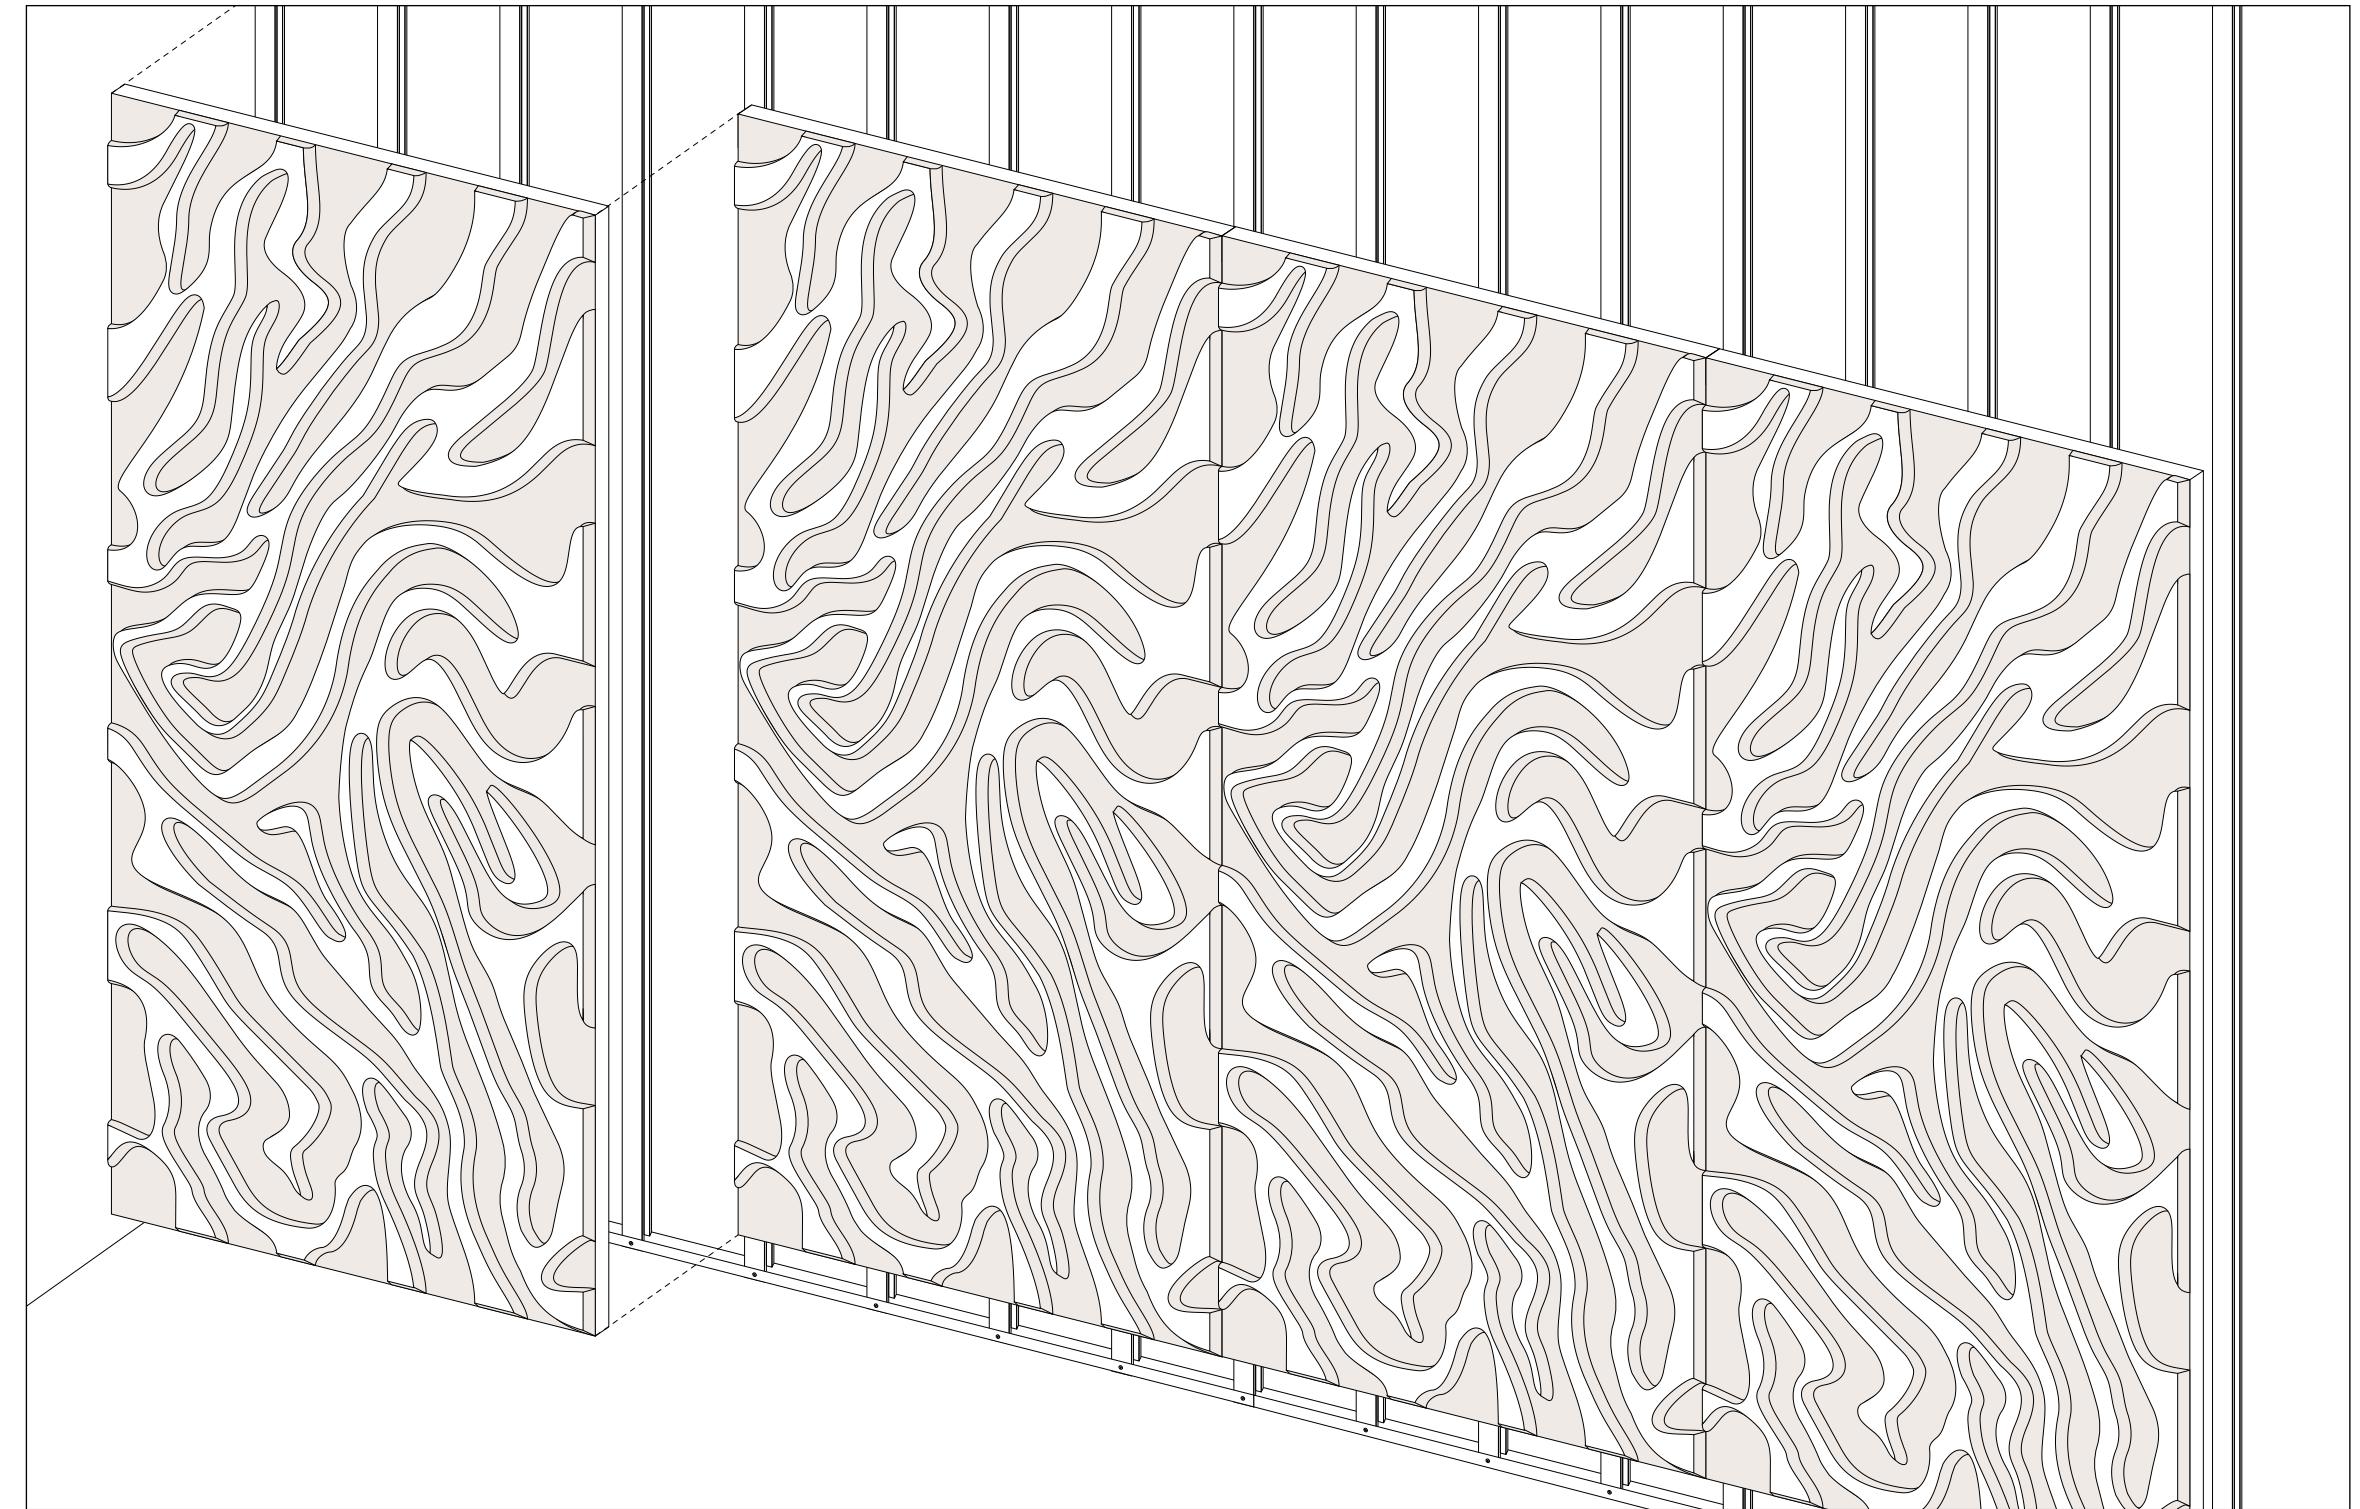

2

Glue the tiles while one stud is at the center of the tile and the two others on each edge. Repeat the process for the entire wall.

×

×