

FOCUS DG

תקרה חצי נסתרת

מערכת תקרה אקוסטית בעלת מראה "צף" ייחודי. התקנה המסתירה את שולי הקונסטרוקציה ומעניקה לתקרה מראה מרחף ויוקרתי. האריחים פריקים בקלות גם בתנאים של גובה התקנה נמוך במיוחד.
האריחים בעובי 20 מ"מ, במשקל כולל פרופילציה 3 ק"ג/מ"ר.


30x120	60x240	60x200	60x180	30x180	60x160	120x120	60x120	61x61	60x60		
											T15
	•	•	•		•	•	•		•		T24
											פיין ליין

*יש לבדוק זמינות מלאי

THK mm	o.d.s. mm	Practical sound absorption coefficient						aw	Sound absorption class
		125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz		
20	65	0.20	0.60	0.95	0.95	0.95	1.00	0.90	A
20	200	0.55	0.85	0.85	0.85	1.00	1.00	0.90	A

THK mm	o.d.s mm	NRC	SAA
20	65	0.90	0.89
20	400	0.80	0.82

Focus DG 20 mm, 65 mm O.D.S.
Focus DG 20 mm, 200 mm O.D.S. - -
O.D.S. = Overall Depth of System

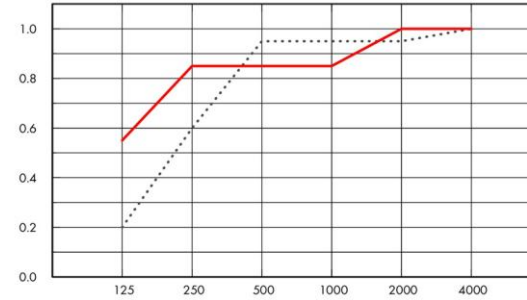

בליעת רעש α - 0.90
מקדם בליעת קול משוקלל
לפי תקן אירופאי



עמידות בלחות
עד 95% לחות יחסית



מאושר לשימוש
ע"י האיגוד השוודי לחקר
האסטמה והאלרגיה



VOC תרכובות אורגניות נדיפות
דרגה M1 המציינת את האיכות הגבוהה
ביותר ואת הפליטה הנמוכה ביותר של
חלקיקים וכימיקלים מזיקים



תכולת חומר ממוחזר
מעל 70%



התקנה
על גבי פרופיל מסוג:
Ecophon connect hd T24





ניקוי האריחים
באמצעות מטלית לחה ושואב אבק




תגובות בשריפה
ע"פ ת"י 755 - d0, s1 - A2




החזר אור
85%

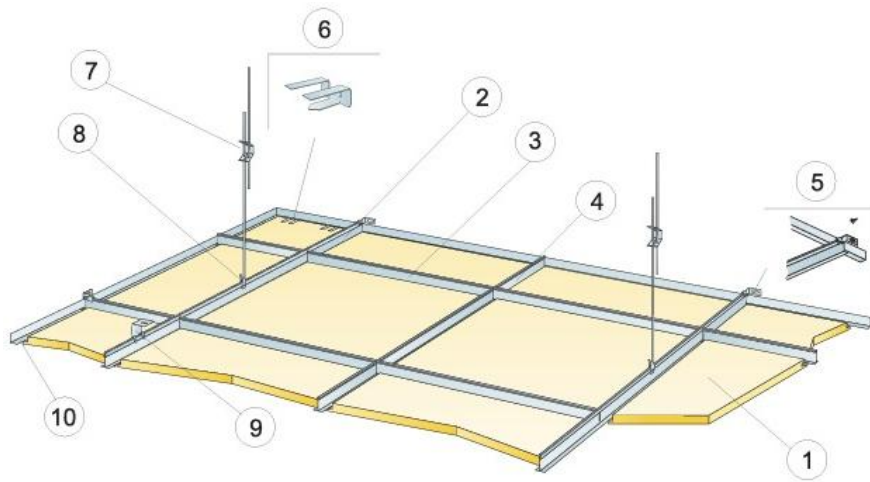

Cut edge with and without support clip



See Quantity specification



Cutting tool Dg

Size, mm	Max live load (N)	Min load bearing capacity (N)
600x600x20	50	160
1200x600x20	50	160

Live load/load bearing capacity.

Quantity specification (excl. wastage)

	Size, mm	
	600x600	1200x600
1 Focus DG	2, 8/m ²	1,4/m ²
2 Connect T24 Main runner HD, installed at 1200 mm centres (max. distance from wall 600 mm, can be extended up to 1200 mm if no live load between Main runner and wall).	0,9/m ²	0,9/m ²
3 Connect T24 Cross tee, L=1200 mm, installed at 600 mm centres	1,7/m ²	1,7/m ²
4 Connect T24 Cross tee, L=600 mm	0,9/m ²	-
5 Connect Wall Bracket for T-proûles	1/suspended row of Main runner	
6 Connect Support clip Dg20	1/300-400 mm on way cut edge	
7 Connect Adjustable Hanger, installed at 1200 mm centres (max. distance from wall 600 mm)	0,7/m ²	0,7/m ²
8 Connect Hanger Clip (not to be used in swimming hall environments)	0,7/m ²	0,7/m ²
9 For direct installation: Connect Direct Bracket, installed at 1200 mm centres	0,7/m ²	0,7/m ²
10 Connect Angle trim, fixed at 300 mm centres	as required as required	
Δ Min. overall depth of system, with Adjustable hanger: 115 mm, with Direct bracket: 65 mm		
δ Min. demounting depth: 30 mm		
For luminaire integration in panels use Connect Bridging	as required as required	



White Frost



Deep Sea



Sage Mist



Morning Rain



Scallop Shells



Spring Leaf



Pine Green



Wet Sand



Silent Steam



Dark Diamond



Cloudy Day



Volcanic Ash



Silver Stone



Silk Slate



Dark Chestnut



Basalt Rock