












SOLO™ UNIQUE

אלמנט תקרה מרחף

פאנלים אקוסטיים בצורות שונות תלויים המאפשרים חופש עיצוב מרבי. פתרון אידיאלי לחללים ללא תקרה מקיר לקיר. האריחים בעובי 40 מ"מ, במשקל כולל פרופילציה 5 ק"ג/מ"ר.




| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
|  |  |  |  |  |  |  |  |  |
| 1000/2400 | 600/2400 | 1139/1198 | 1040/1200 | 1040/1200 | 1197/1416 | 1139/1200 | Ø800 | 1200/1200 |
| | 1200/2400 | | | | | | Ø1200 | |
| | 1200/1800 | | | | | | Ø1600 | |
| | 1200/3000 | | | | | | | |

*יש לבדוק זמינות מלאי

| THK mm | o.d.s. mm | Aeq, Equivalent absorption area per unit (m ² sabin) | | | | | |
|--------|-----------|---|--------|--------|---------|---------|---------|
| | | 125 Hz | 250 Hz | 500 Hz | 1000 Hz | 2000 Hz | 4000 Hz |
| 40 | 200 | 0.5 | 1.4 | 2.0 | 2.4 | 2.3 | 2.3 |
| 40 | 400 | 0.4 | 1.2 | 1.8 | 2.6 | 2.7 | 2.7 |
| 40 | 1000 | 0.4 | 1.1 | 2.0 | 2.9 | 2.9 | 2.8 |

Solo Square 1200x1200, 200 mm o.d.s. —
Solo Square 1200x1200, 400 mm o.d.s. - - -
Solo Square 1200x1200, 1000 mm o.d.s. ···
O.D.S. = Overall Depth of System

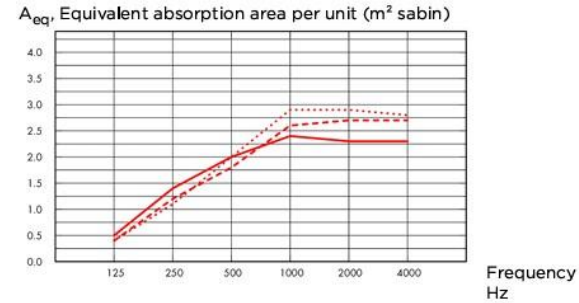

בליעת רעש
לפי נוסחת SABIN



עמידות בלחות

עד 70% לחות יחסית
RH-ב 30° C
מבלי לשקוע ולהתקלף
ע"פ תקן ISO 4611



דרגת סטריליות והיגיינה

ע"י האיגוד השוודי לחקר
האסטמה והאלרגיה



VOC תרכובות אורגניות נדיפות

דרגה M1 המציינת את האיכות הגבוהה
ביותר ואת הפליטה הנמוכה ביותר של
חלקיקים וכימיקלים מזיקים



תכולת חומר ממוחזר

100%



התקנה

עם כבלי פלדה תוצרת Ecophon



ניקוי האריחים

באמצעות מטלית לחה ושואב אבק




תגובות בשריפה

ע"פ ת"י A2-s1, d0 - 755




חוזר אור


84%

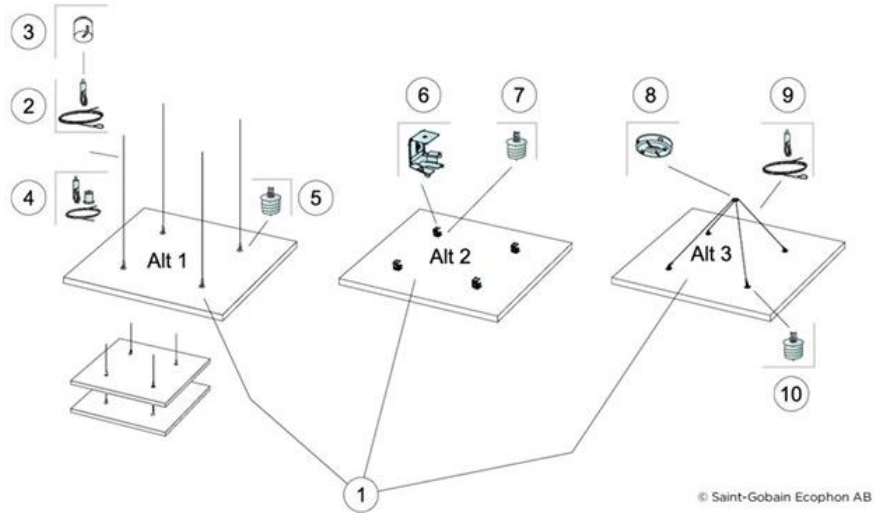


© Saint-Gobain Ecophon AB




Two types of Adjustable wire solutions



Panels can be installed in angles



See Quantity specification



Panels can be suspended underneath each other

Quantity specification (excl. wastage)

| | | Size, mm |
|-------------------|---|---------------------------|
| | | 1200x1200 |
| 1 | Solo Square | 1,44m ² /panel |
| Mounting Option 1 | | - |
| 2 | Connect Looped Wire Hanger (Hook + Looped wire) | 4/panel |
| 3 | Connect Covering cup (Optional) | 4/panel |
| 4 | Connect Wire Kit (Hook + Ceiling holder + Wire) | 4/panel |
| 5 | Connect Absorber anchor | 4/panel |
| Mounting Option 2 | | - |
| 6 | Connect Absorber bracket | 4/panel |
| 7 | Connect Absorber anchor | 4/panel |
| Mounting Option 3 | | |
| 8 | Connect One-point fixing | 1/panel |
| 9 | Connect Looped Wire Hanger (Hook + Looped wire) | 2/panel |
| 10 | Connect Absorber anchor | 4/panel |

Notes

Δ Min. overall depth of system: Δ 1 140 mm / Δ 2 90 mm / Δ 3 500 mm



White Frost



Deep Sea



Sage Mist



Morning Rain



Scallop Shells



Spring Leaf



Pine Green



Wet Sand



Silent Steam



Dark Diamond



Cloudy Day



Volcanic Ash



Silver Stone



Silk Slate



Dark Chestnut



Basalt Rock