


# BAFFLE BEAM

## תקרה לא פריקה

BEAM היא מערכת יחידות אקוסטיות להתקנה אנכית, הזמינה במידות שונות ובמגוון רחב של גוונים. המערכת מאפשרת תלייה אחידה באמצעות פרופיל מחבר, השומר על מראה תקרתי דינמי, נקי ומוקפד. המערכת נמכרת כמודול מ-4 חלקים, וניתנת לחיבור ברצף ליצירת המשכיות תקרתית.

| עובי הבאפל                | אורך                 |
|---------------------------|----------------------|
| 40 מ"מ                    | 2790 מ"מ             |
| 50 מ"מ                    | 2400 מ"מ             |
| (עשוי מלוחות בעובי 9 מ"מ) |                      |
| גובה                      | כמות מינימלית להזמנה |
| 100 מ"מ                   | 12 יח' לצבע אחיד     |
| 150 מ"מ                   |                      |
| 160 מ"מ                   |                      |
| 250 מ"מ                   |                      |

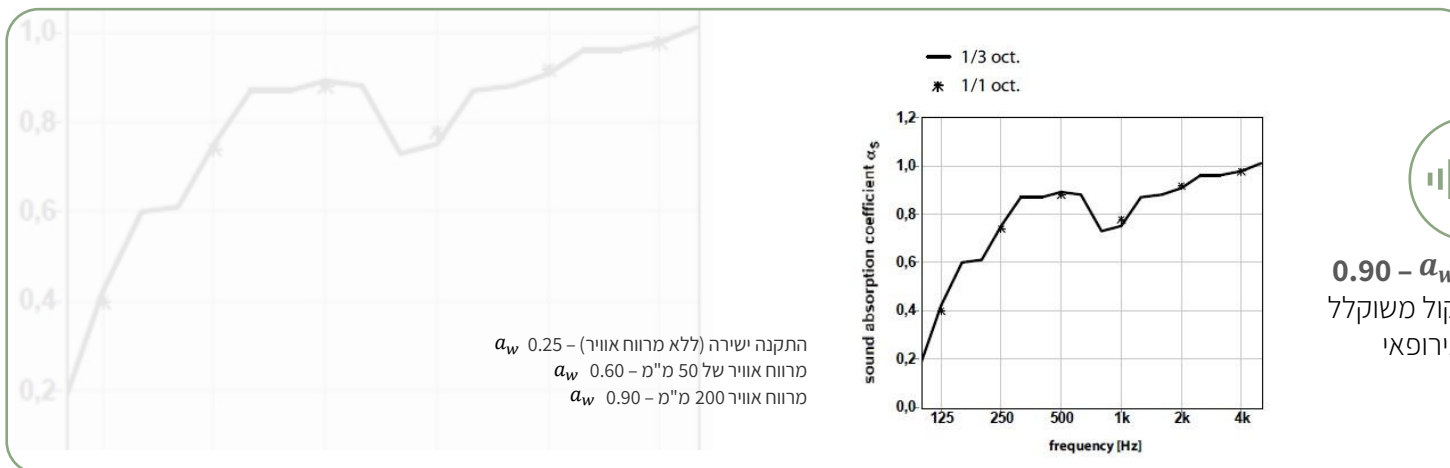

**בליעת רעש  $a_w$  - 0.90**  
 מקדם בליעת קול משוקלל  
 לפי תקן אירופאי



**התקנה**  
 ע"ג קונס' ייעודית



**VOC תרכובות אורגניות נדיפות**  
 לוחות אקושייפ עומדים בתקן CDPH V1.2  
 לבחינת פליטת VOC. המוצר נבדק ונמצא  
 נקי ממזהמים נדיפים



**תכולת חומר ממוחזר**  
 70% בקבוקי פלסטיק  
 ממוחזרים



**עמידות בלחות**  
 פוליאסטר אינו מושפע  
 מלחות, עובש, או טחב.  
 עמיד ב- 90% לחות



**ניקוי האריחים**  
 לשימוש פנימי בלבד.  
 ניקוי אבק באמצעות שואב או מטלית לחה, וטיפול  
 מיידי בכתמים באמצעות מים ומטלית רכה (לחלוטין  
 עם חומר ניקוי עדין), תוך הקפדה על ייבוש המשטח.




**תגובות בשריפה**  
 EN13501-1 | B S-1 d0  
 ASTM E-84 - Class A

דגמים


MODELS

BEAM

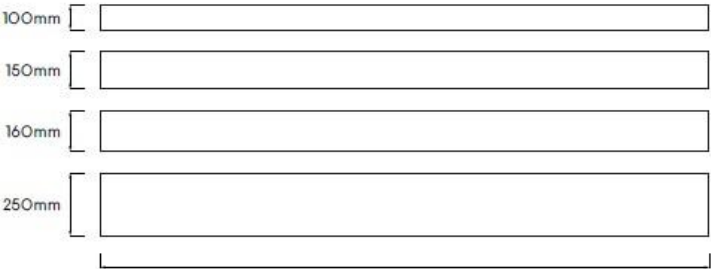


2790mm | 2400mm  
(10945") | (9449")

|   |       |       |       |       |
|---|-------|-------|-------|-------|
| H | 100mm | 150mm | 160mm | 250mm |
| W | 50mm  | 50mm  | 40mm  | 50mm  |
| G | 250mm | 150mm | 160mm | 250mm |
| M | 150mm | 200mm | 200mm | 300mm |

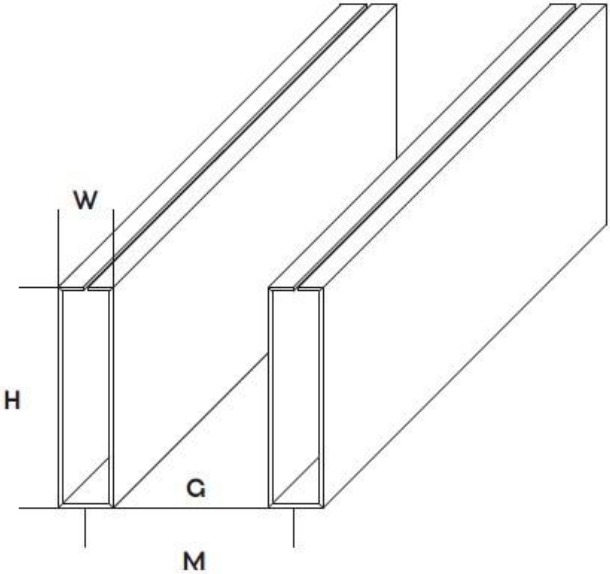

איזומטריה

ISOMETRIC

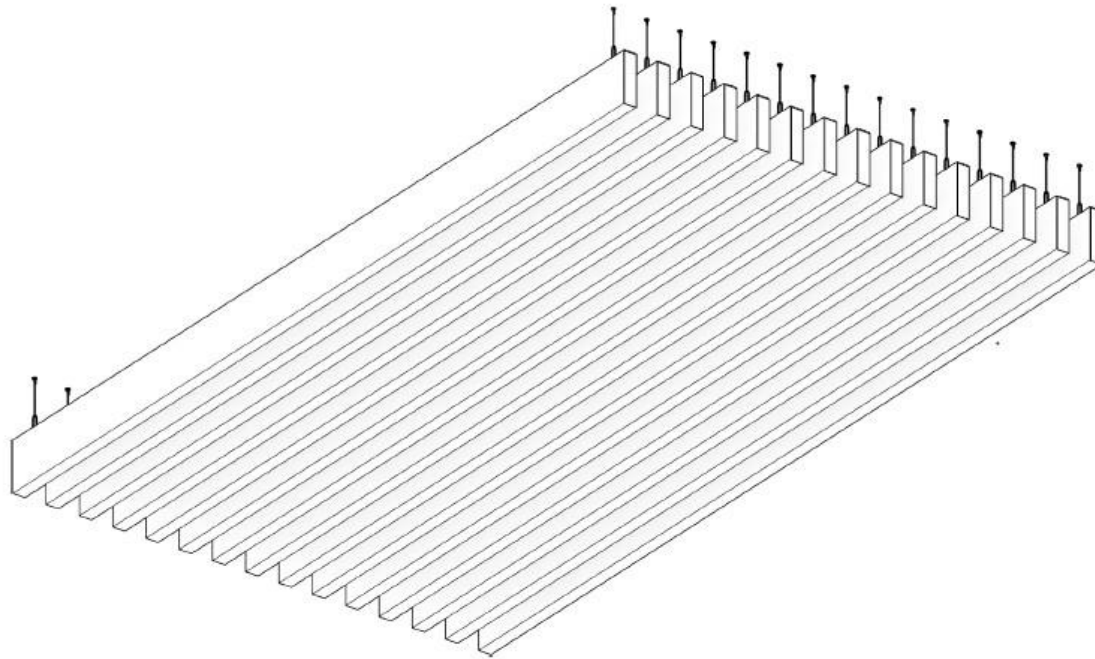

מפרט טכני  
רשימת רכיבים



Beam



Perforated L - Profile




Adjustble Hanger



Dedicated Cable  
Hanging Accessory




Screw & Nut




Dedicated H Profile

שיטת התקנה

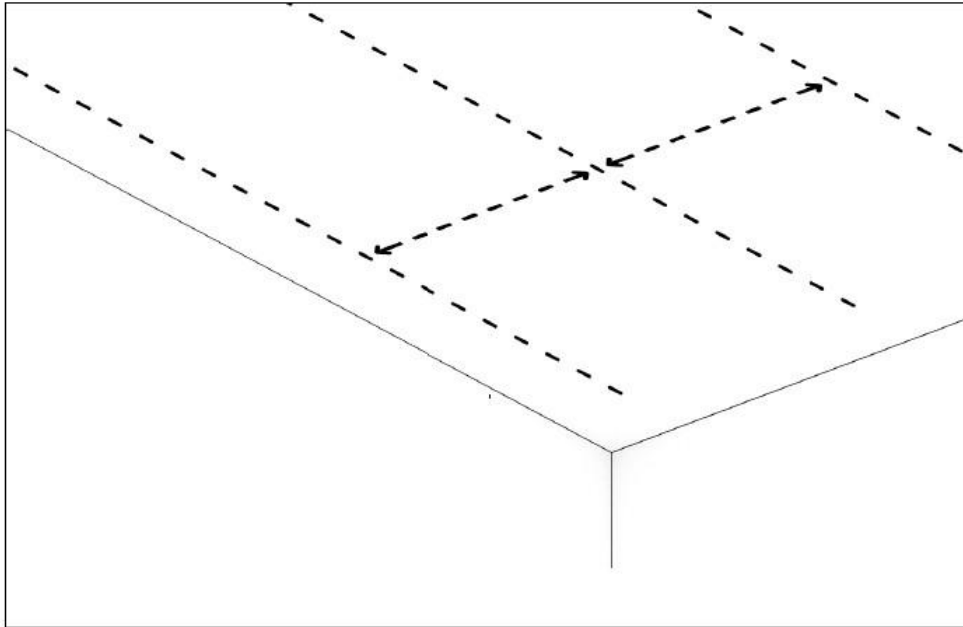


Mark the ceiling line on the above ceiling . Keep a gap of 80-120cm between hanging rows.

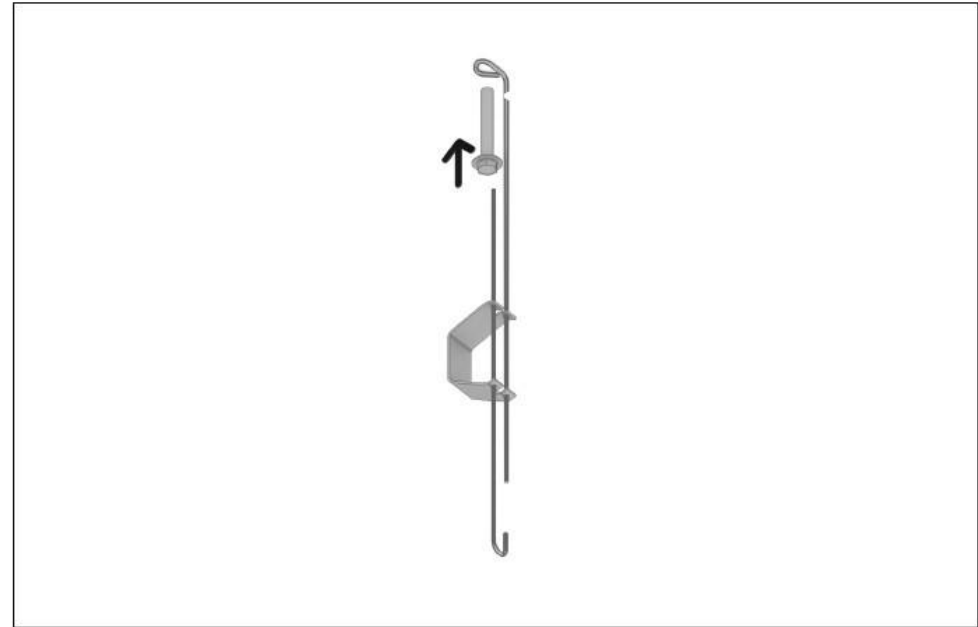


Install the adjustable hangers accordingly.

שיטת התקנה

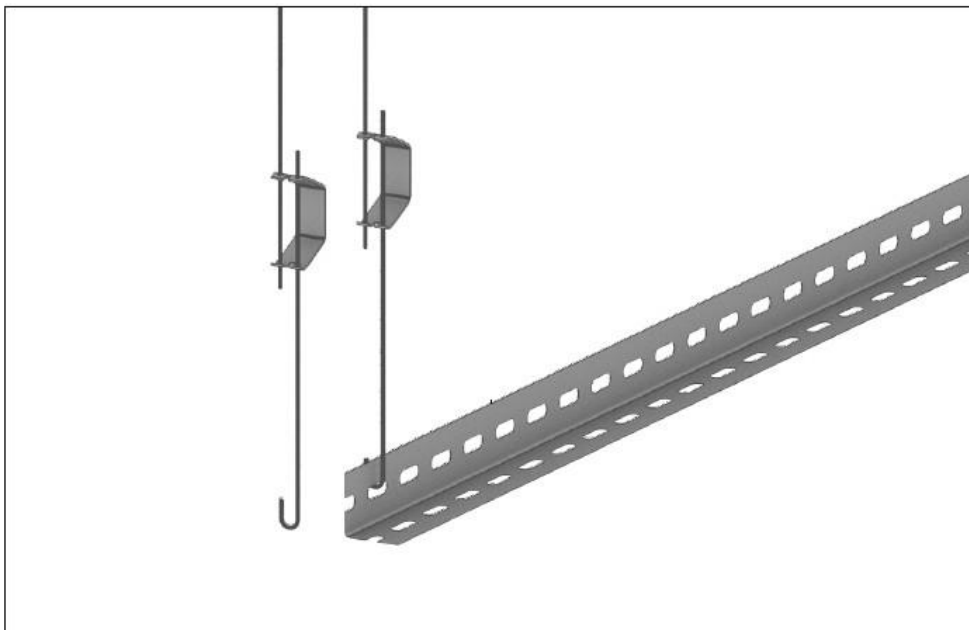


Connect the Perforated L Profiles to the Adjustable Hangers.

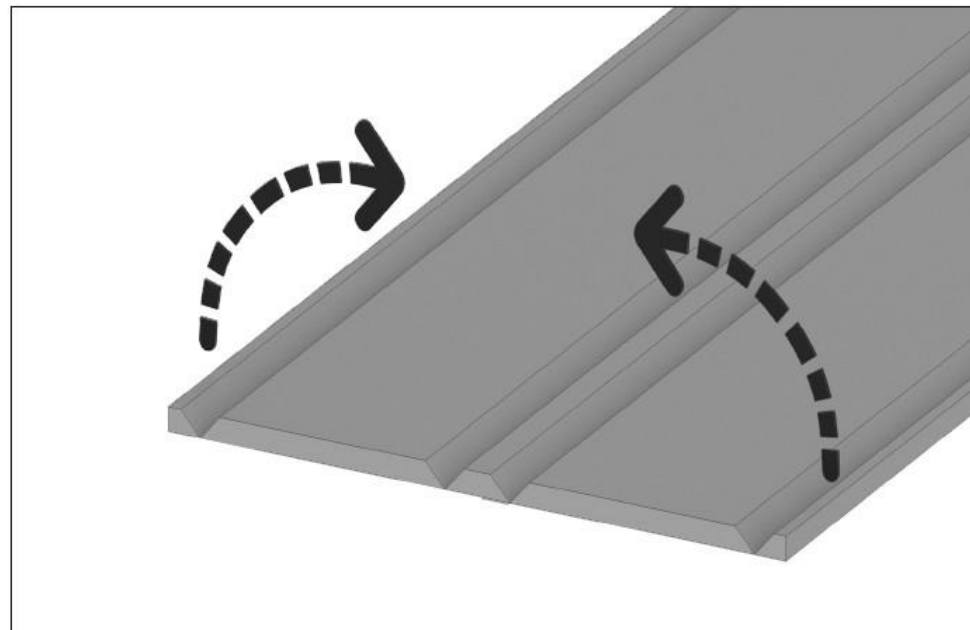


Fold the Beam in according to the slots

שיטת התקנה

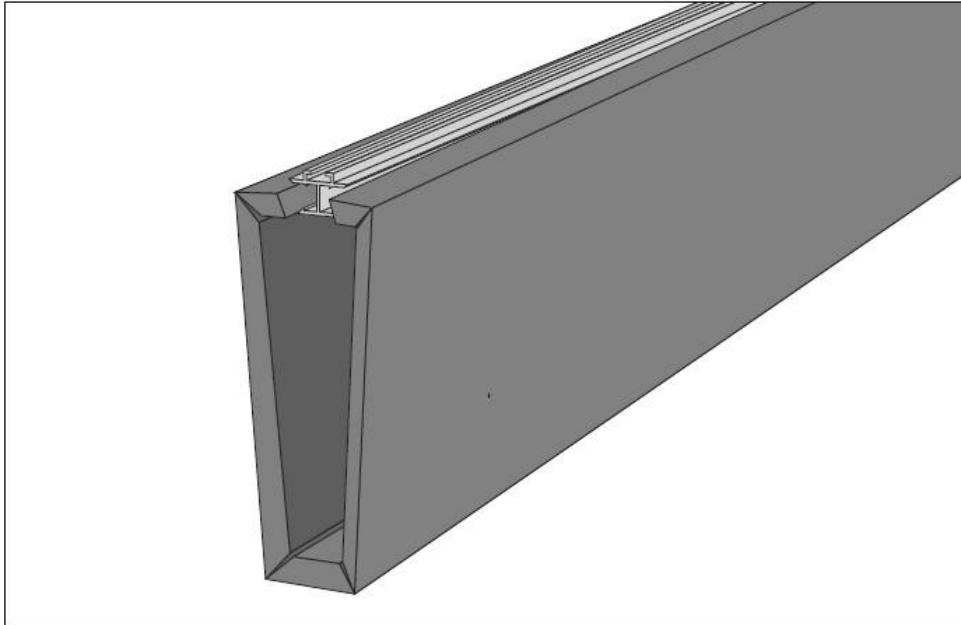

5


Insert the H Profile into the Beam. Make sure to do so all the way down.

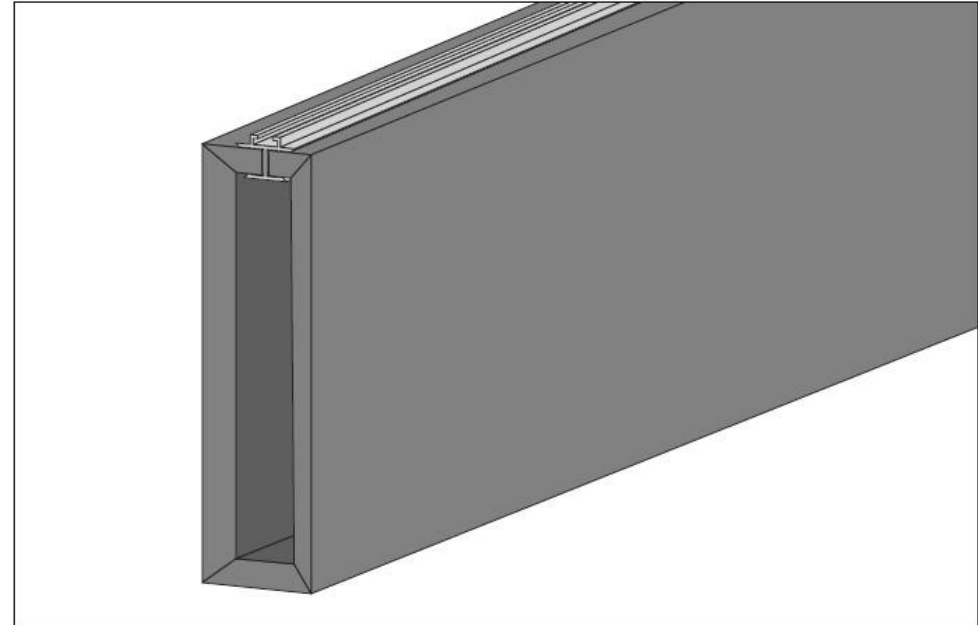


6

Close the H profile into the Beam. Make sure to do so all the way down.

שיטת התקנה

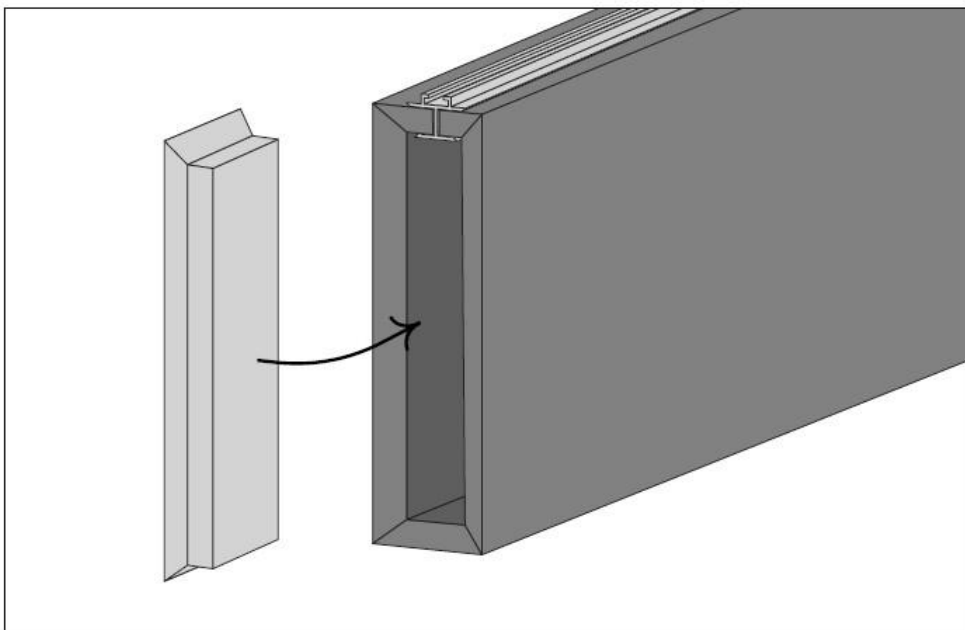


Insert the End Cap into the end of the Beam.

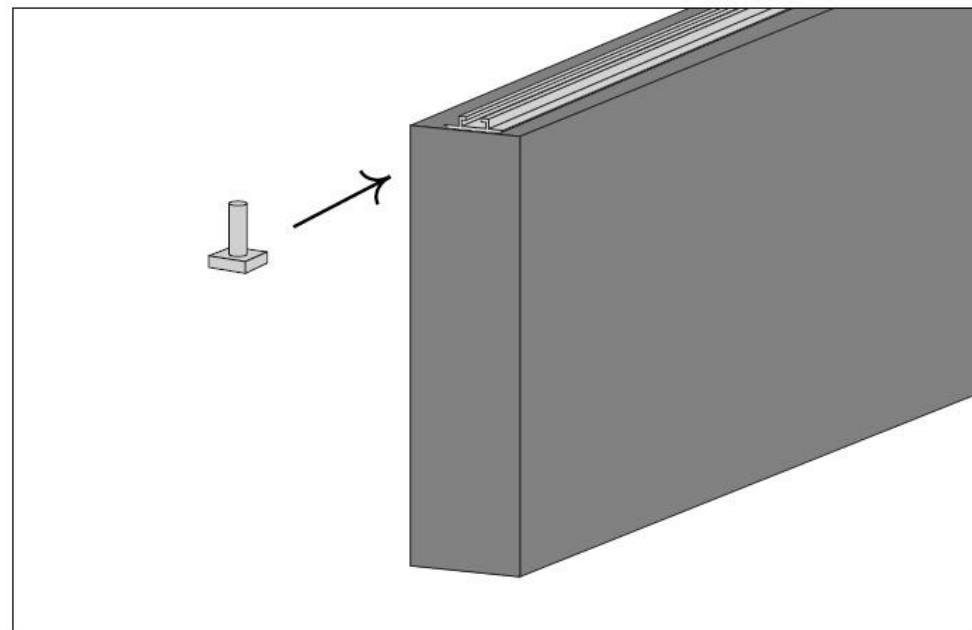


Slide the screw into the H Profile facing up

שיטת התקנה

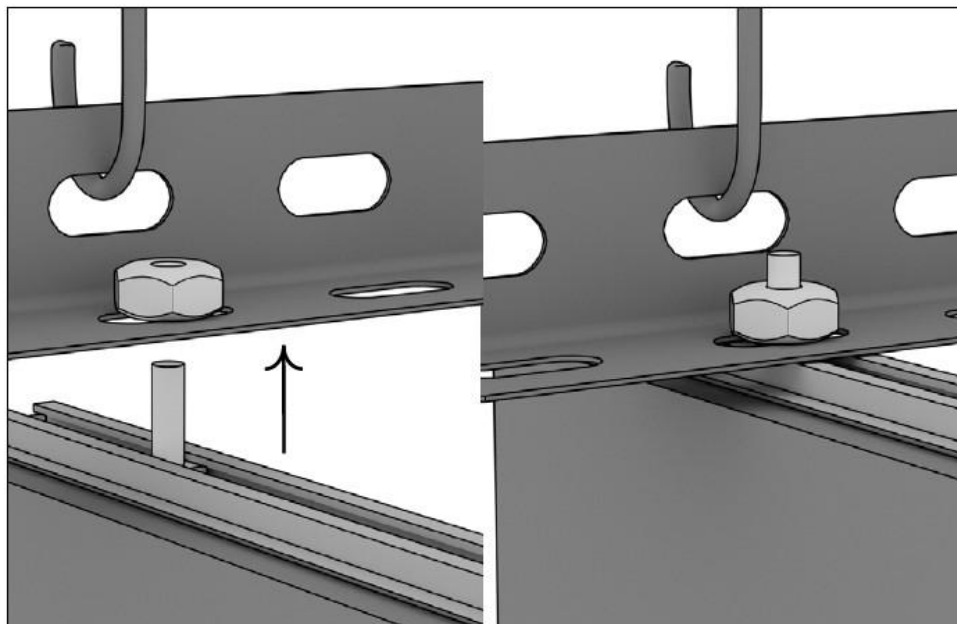

9


Tighten the nut to the screw through the L profile

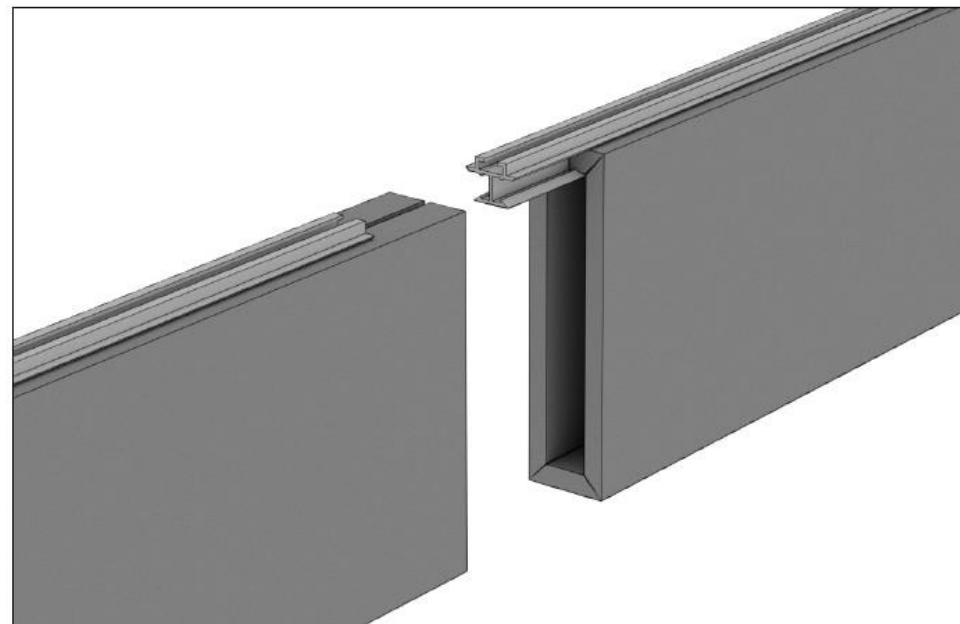

10

When two Beams are aligned - make sure to connect them with a H profile. keep a 5mm detaching distance between two continuous Beams.

שיטת התקנה

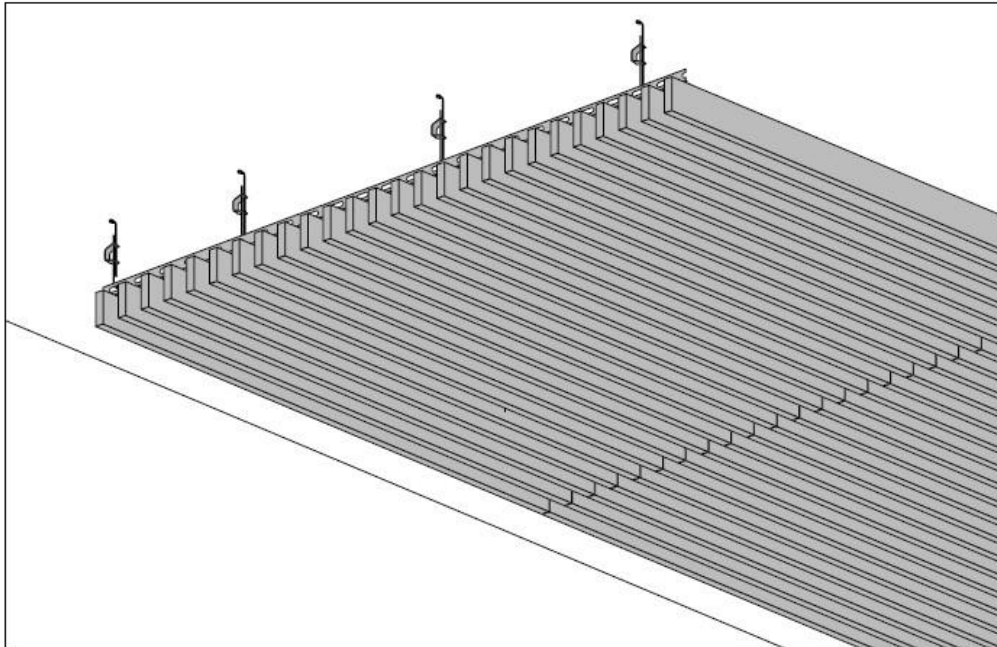

Repeat the process for the entire ceiling.