




FOCUS A

תקרה מונחת

תקרה אקוסטית עם מערכת קונסטרוקציה גלויה ואריחים פריקים בקלות. המערכת מתאימה ליישומים הדורשים תקרה תלויה עמידה ויציבה. האריחים בעובי 20 מ"מ, במשקל כולל פרופילציה 3 ק"ג/מ"ר.

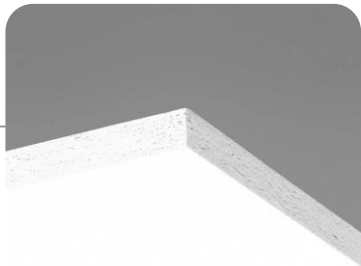

30x120	60x240	60x200	60x180	30x180	60x160	120x120	60x120	61x61	60x60		
							•		•		T15
	•	•	•		•	•	•	•	•		T24
											פיין ליין


*יש לבדוק זמינות מלאי

	THK mm	o.d.s. mm	Practical sound absorption coefficient						AW	Sound absorption class
			125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz		
-	20	50	0.10	0.45	0.85	1.00	1.00	1.00	0.75	C
-	20	200	0.50	0.90	1.00	0.90	1.00	0.95	0.95	A
+Extra Bass	70	200	0.90	0.90	0.90	0.95	1.00	1.00	1.00	A
gamma	20	200	0.55	0.40	0.50	0.35	0.20	0.25	0.25	D
Gamma + Extra Bass	70	200	0.70	0.40	0.45	0.40	0.20	0.25	0.25	D

THK mm	o.d.s mm	NRC	SAA
20	60	0.90	0.87
20	400	0.85	0.85

Focus A 20 mm, 50 mm O.D.S.
 Focus A 20 mm, 200 mm O.D.S. - -
 Focus A 20 mm, Extra Bass 50 mm, 200 mm O.D.S. - - -
 Focus A gamma 20 mm, Extra Bass 50 mm, 200 mm O.D.S.
 O.D.S. = Overall Depth of System

α_p , Practical sound absorption coefficient

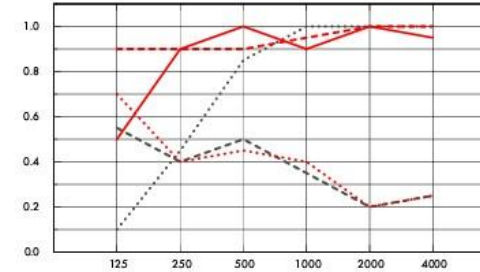

Frequency Hz



בליעת רעש $\alpha = 1.00$
 מקדם בליעת קול משוקלל
 לפי תקן אירופאי



עמידות בלחות
 עד 95% לחות יחסית



מאושר לשימוש
 ע"י האיגוד השוודי לחקר
 האסטמה והאלרגיה



VOC תרכובות אורגניות נדיפות
 דרגה M1 המציינת את האיכות הגבוהה
 ביותר ואת הפליטה הנמוכה ביותר של
 חלקיקים וכימיקלים מזיקים



תכולת חומר ממוחזר
 מעל 70%



התקנה
 על גבי פרופיל מסוג:
 T24 / T15





ניקוי האריחים
 באמצעות מטלית לחה ושואב אבק




תגובות בשריפה
 ע"פ ת"י 755 - d0 - s1 - A2




החזר אור
 85%

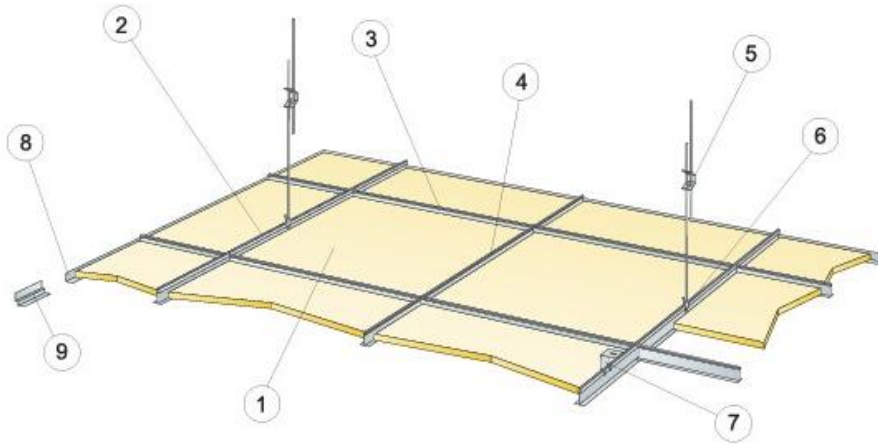

Suspension with adjustable hanger and clip



See Quantity specification



Suspension with direct bracket


Size, mm	Max live load (N)	Min load bearing capacity (N)
600x600x20	50	160
1200x600x20	50	160
1200x1200x20	50	160

Live load/load bearing capacity.

Quantity specification (excl. wastage)

	Size, mm		
	600x600	1200x600	1200x1200
1 Focus A	2, 8/m ²	1,4/m ²	0,7/m ²
2 Connect T24 or T15 Main runner, installed at 1200 mm centres (max. distance from wall 600 mm, can be extended up to 1200 mm if no live load between Main runner and wall).	0,9/m ²	0,9/m ²	0,9/m ²
3 Connect T24 or T15 Cross tee, L=1200 mm, installed at 600 mm centres	1,7/m ²	1,7/m ²	0,9/m ²
4 Connect T24 or T15 Cross tee, L=600 mm	0,9/m ²	-	-
5 Connect Adjustable hanger, installed at 1200 mm centres (max. distance from wall 600 mm)	0,7/m ²	0,7/m ²	0,7/m ²
6 Connect Hanger Clip (not to be used in swimming hall environments)	0,7/m ²	0,7/m ²	0,7/m ²
7 For direct installation: Connect Direct Bracket, installed at 1200 mm centres	0,7/m ²	0,7/m ²	0,7/m ²
8 Connect Angle trim, fixed at 300 mm centres	as required	as required	as required
9 Connect Shadow-line trim, fixed at 300 mm centres	as required	as required	as required
Δ Min. overall depth of system, with adjustable hanger: 100 mm, with direct bracket: 50 mm			
δ Min. demounting depth: 120 mm (130 mm with 1200x1200)			
For luminaire integration in panels use Connect Bridging	as required	as required	as required

When using panels in format 1200x1200 mm and XL-format in combination with T15 grid, secure grid with wall brackets



White Frost



Deep Sea



Sage Mist



Morning Rain



Scallop Shells



Spring Leaf



Pine Green



Wet Sand



Silent Steam



Dark Diamond



Cloudy Day



Volcanic Ash



Silver Stone



Silk Slate



Dark Chestnut



Basalt Rock