
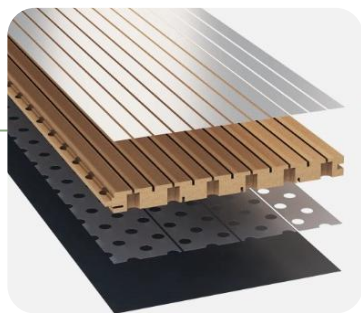


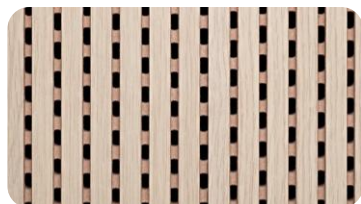

# SCREENBALL CEILING

## תקרה רציפה, לא פריקה



תקרה רציפה שאינה פריקה, מתאימה ליישומים בהם נדרש מראה עשיר, טבעי ורציף בשילוב מערכת נישאים נסתרת.

האריח עשוי MDF כפול בעובי 16 מ"מ בדרגה E1 בגמר פורניר/מלמין/צבע.

בגב האריח מודבקת גיזה אקוסטית מסוג Soundtex בצבע שחור.

משקל האריח כולל פרופילציה 12.5 ק"ג/מ"ר.

| מידות אריח   | עובי                     |
|--------------|--------------------------|
| 197X2800 מ"מ | 16 מ"מ                   |
| קונס'        | גמרים                    |
| ע"ג Rail     | מלמין – Niagara Oak מלאי |
|              | פורניר                   |
|              | צבע                      |

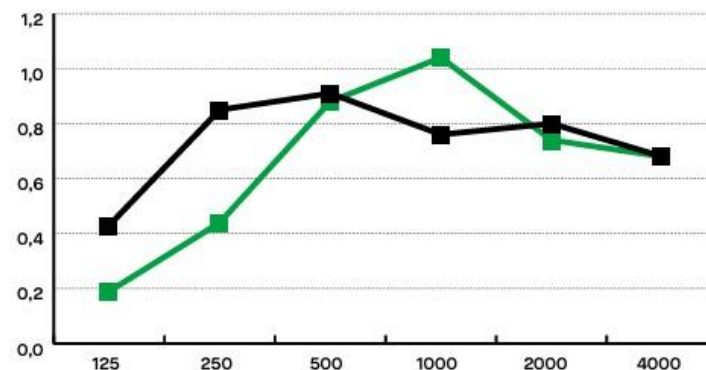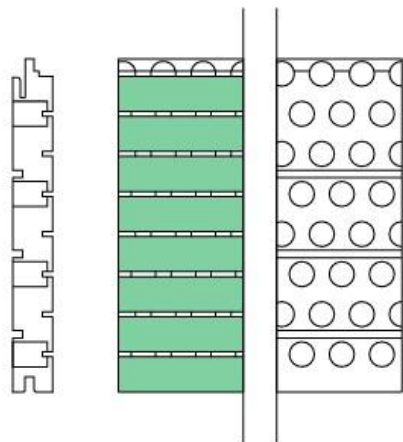

| Hz   | 20 wall αs | 200 ceiling αs |
|------|------------|----------------|
| 125  | 0,19       | 0,43           |
| 250  | 0,44       | 0,85           |
| 500  | 0,88       | 0,91           |
| 1000 | 1,04       | 0,76           |
| 2000 | 0,74       | 0,80           |
| 4000 | 0,68       | 0,68           |

| NRC | 20 wall αw | 200 ceiling αw |
|-----|------------|----------------|
|     | 0,80       | 0,85           |
| αw  | 0,75       | 0,80           |



**בליעת רעש αw - 0.80**  
מקדם בליעת קול משוקלל  
לפי תקן אירופאי

לקבלת הערכים האקוסטיים הנדרשים, יש להניח מעל התקרה מזרן צמר סלעים / צמר זכוכית



**התקנה**  
על גבי פרופיל מסוג:  
Rail




**VOC תרכובות אורגניות נדיפות**  
דרגה E1



**ניקוי האריחים**  
באמצעות מטלית לחה ושוואב אבק



**תגובות בשריפה**  
ע"פ ת"י 755 - s2, d0

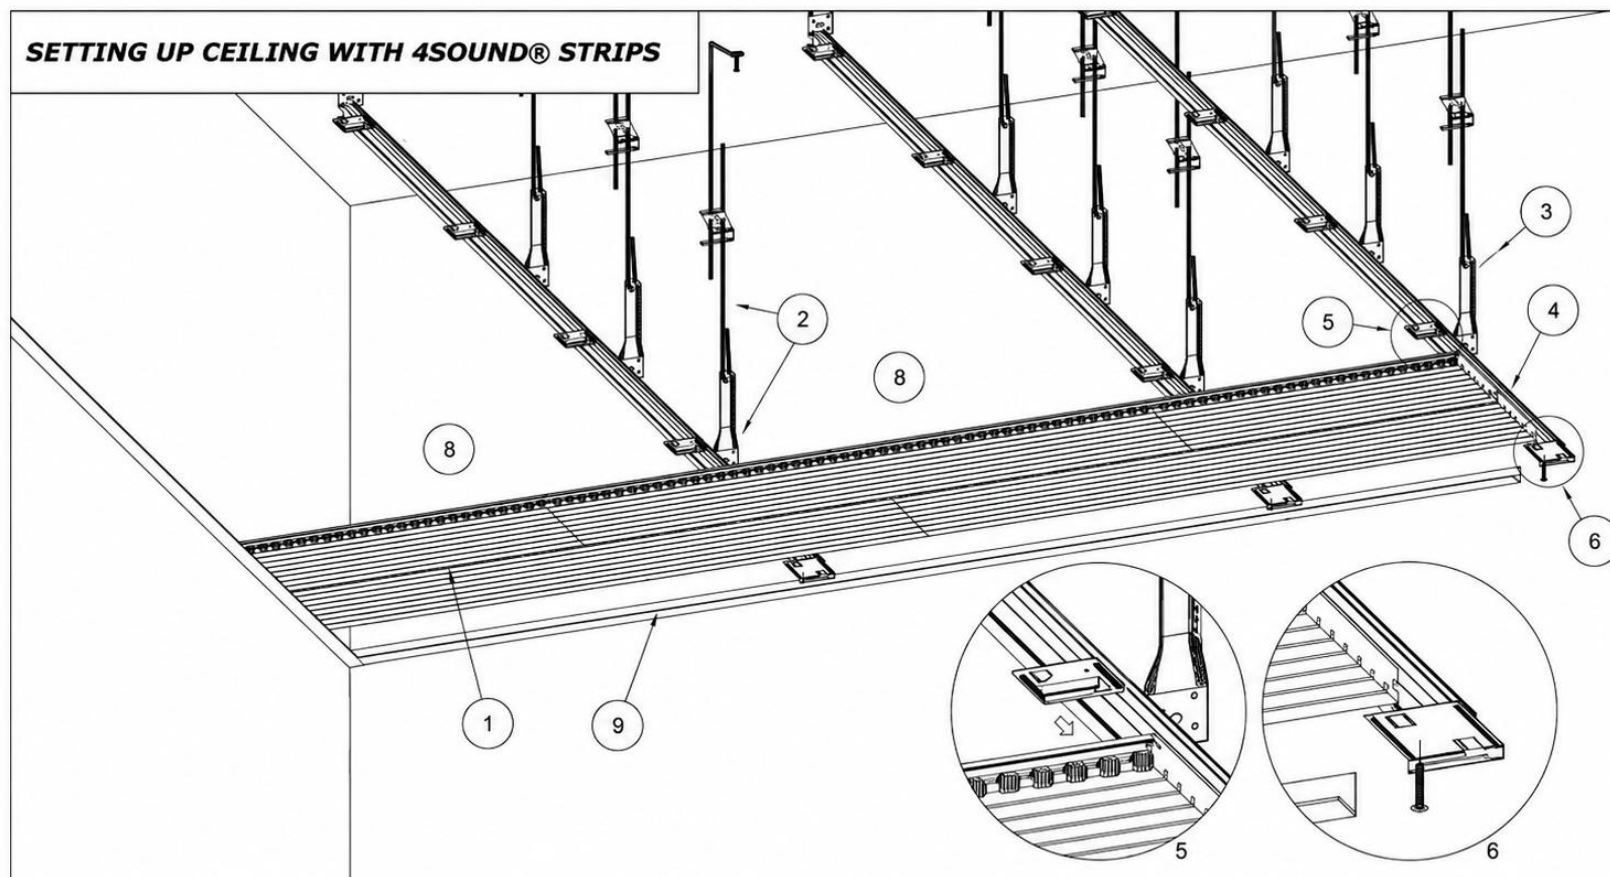

## Installation instructions

- Build the metal support structure by fitting the Ω rail (4) using the special hangers (2) at the required height from the ground. The recommended distance between the metal support rails and the hangers is about 60 cm
- The Ω rails must be fitted at right angles to the direction of the 4sound® strips (1)
- Fit the perimeter rail (9) leaving a gap of 16 mm between the rail's horizontal seat and the support structure
- Place the female side of the first 4SOUND® strip up against the perimeter rail and secure it to the Ω rail using the starter clip (6)
- Insert the butterfly plates (7) for a better tightness every 4 strips
- Place the second strip against the first and then continue with the subsequent strips, repeating the anchoring operation using the fixing clip (5) until installation has been completed. It is recommended that the fixing clips be secured to the support structure omega rail by means of self tapping screws.

|   |                                            |
|---|--------------------------------------------|
| 9 | ALUMINIUM ANGLE BAR                        |
| 8 | INSULATING MAT                             |
| 7 | BUTTERFLY PLATES                           |
| 6 | STARTING CLIP                              |
| 5 | FIXING CLIP                                |
| 4 | Ω RAIL                                     |
| 3 | SECURITY PIN FOR CONNECTING HANGING CABLES |
| 2 | PAIR OF HANGING CABLES                     |
| 1 | 4SOUND® STRIP                              |


## WOOD VENEER PALETTE




Alberta Maple  
11.10




Striped White  
18.05



Pearl 13.19



Planked White  
18.21



Planked Oak  
12.96




Ash Grey 13.10



Light Grey Oak  
11.06



Sand Oak 10.83




Oak Planked  
10.52



Balanced Oak  
10.63



American Walnut  
10.16



Makassar Ebony  
12.42



Noce Italiano  
Striped 12.12



American Walnut  
10.18



Dove Grey 13.11




Striped XI Sand  
18.06



Wavy American  
Walnut 12.19



Walnut Planked  
10.17



Celebes Ebony  
10.41

## MELAMINE PALETTE



D20240 CX Oasis



D20250 CX Origin



D20260 CX Ocean



D20270 CX Eden



D20280 CX Embrace



D20290 CX Emotion



D20300 CX Amity



D20310 CX Adoration



D20320 CX Allegory



D2240 VL Niagara Oak  
\*מלאי

## COLOR PALETTE



RAL / NCS