

CEILING

Bubble

The bubble is a family of 3D acoustic tiles with a hemispherical design for walls and ceilings. For the ceiling, one can use either convex or concave tile. The wall has three options: convex, light, or plant tile. The bubble tiles can be combined with flat tiles to create many different wall design possibilities. The tiles come in various shades from our updated color palette and can be painted in any desired shade.



9 mm

600×600 mm / 595×595 mm







Specifications	3
Models	4
Isometry	5
Color Palette	6
Wood Collection	8
Installation - Method 1	10
Installation - Method 2	12



Manufactured From Panels

Composition 100% Polyester (PET)

Sustainability 70% Recycled drinking bottles

Application Wall covering

Fire Rating EN13501-1 B S-1 d0

Size 600×600 mm / 595×595 mm

Thickness 9 mm (tolerance ±7%)

Installation Varies

Acoustic aw = 0.55

VOC According to EN ISO 16000-9

Standard: A+

Pattern Repeat Non-woven with a consistent pattern repeat. Despite


slight variations due to fiber blending and lay-up, inherent to the product, it maintains uniformity in design, offering a unique yet coherent aesthetic.

Color Fading Assessment of color fastness according to EN 1587


Assessed against the grey scale ISO-A02.

Care Can be simply clean using a damp cloth and

vacuum cleaner.









Bubble Convex




Bubble Concave




59.5 mm



Bubble Convex




600 mm









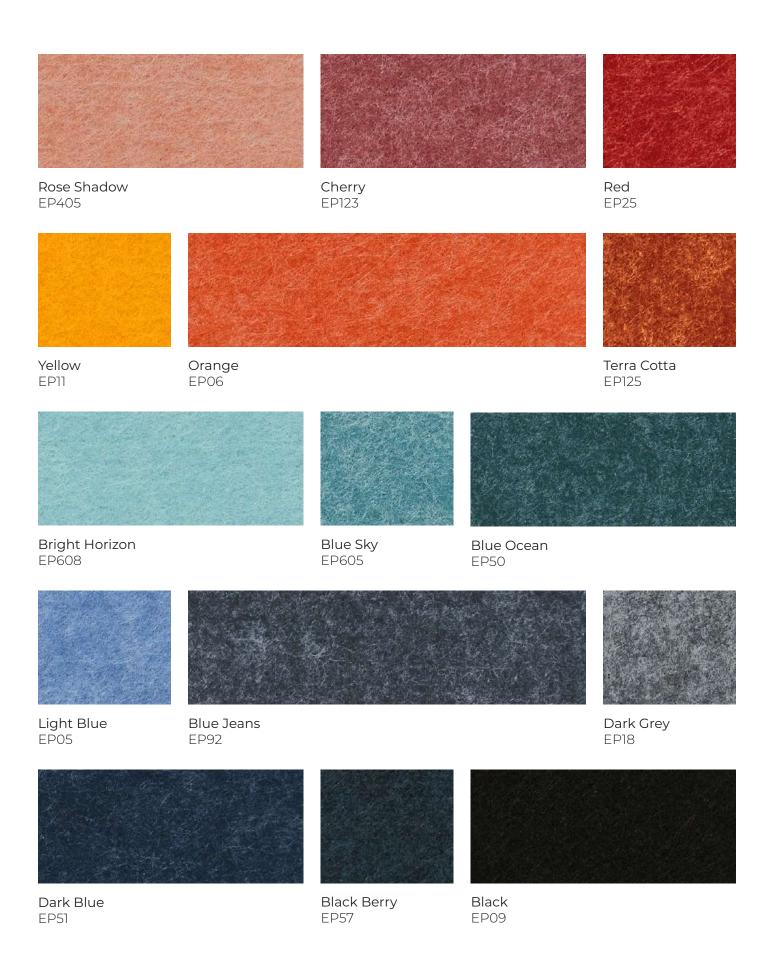






Strip Wenge EPW0202N



American Walnut EPW0203N



Teak EPW0302N



Strip American Cherry EPW0304N



Strip European White Oak EPW0401N



Flower European White Oak EPW0402N





Split Oak EPW0404N

European White Oak EPW0405N





Strip White Oak EPW0407N

Smoked Oak EPW0408N



Strip Maple EPW0504N

Strip Greige Oak EPW0702N



PREPARATIONS - METHOD 1


Make sure that the ceiling on which you are installing the Bubble is leveled or distanced equally, and prepare construction sillicon.




Apply a strip of sillicon to the back of the Bubble tile.





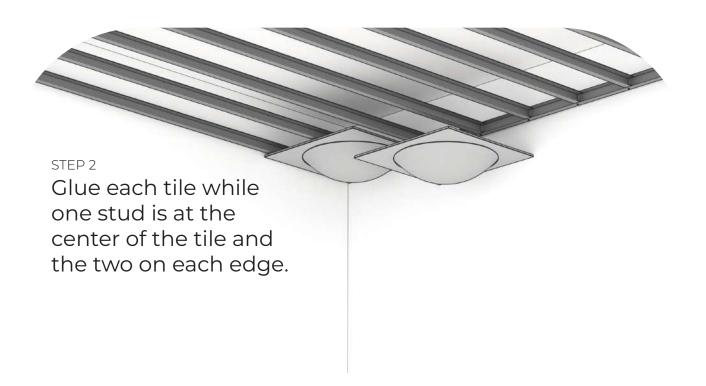


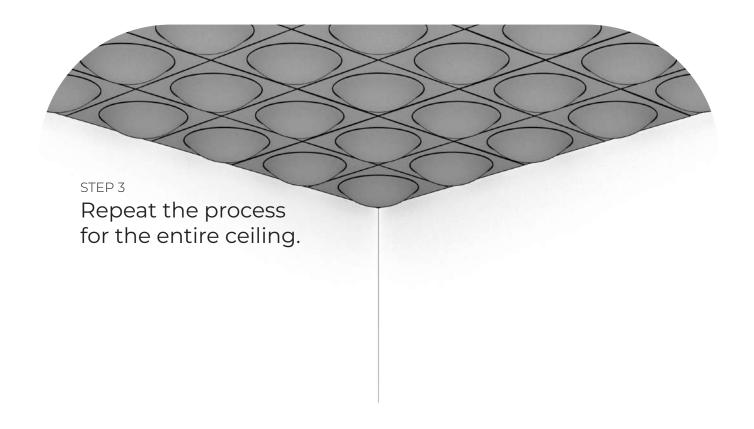



PREPARATIONS - METHOD 2

Make sure that the ceiling on which you are installing the Bubble is leveled or distanced equally, and prepare construction sillicon.

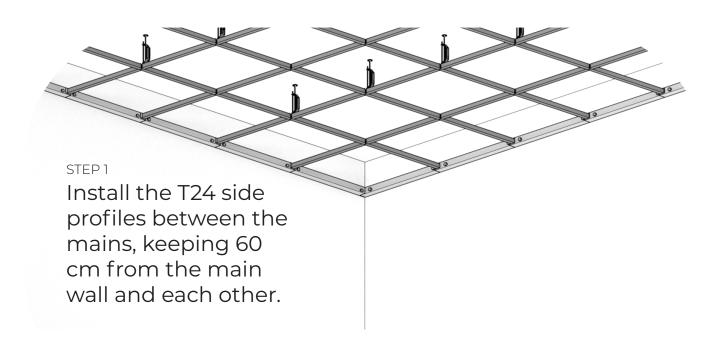



STEP 2

Insert the Bubbles into the T24 construction the following way.

