

CEILINGS  
INSTALLATION GUIDE

# Feltline

Continuous elongated tiles that produce a continuous linear appearance to the space. The units connect to each other in a minimal disconnect slot. A selection of shades from an existing fan of colors. Can be painted in any desired shade.

THICKNESS

6 mm

9 mm



LENGTH

120x60 cm

240x60 cm


**DIMENSIONS**

---

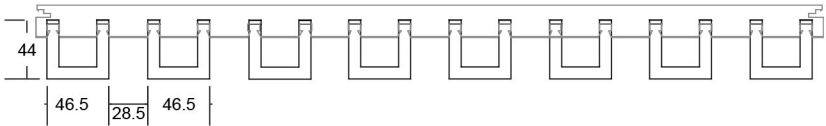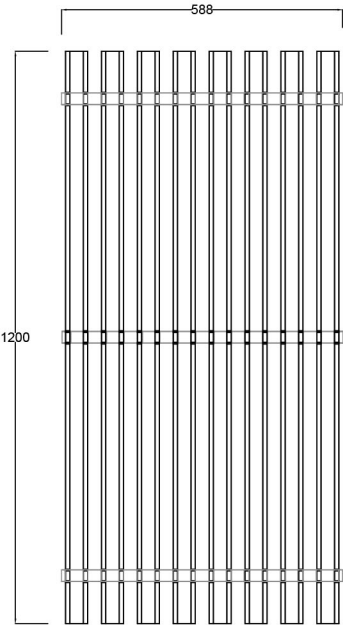


**ISOMETRY**

---

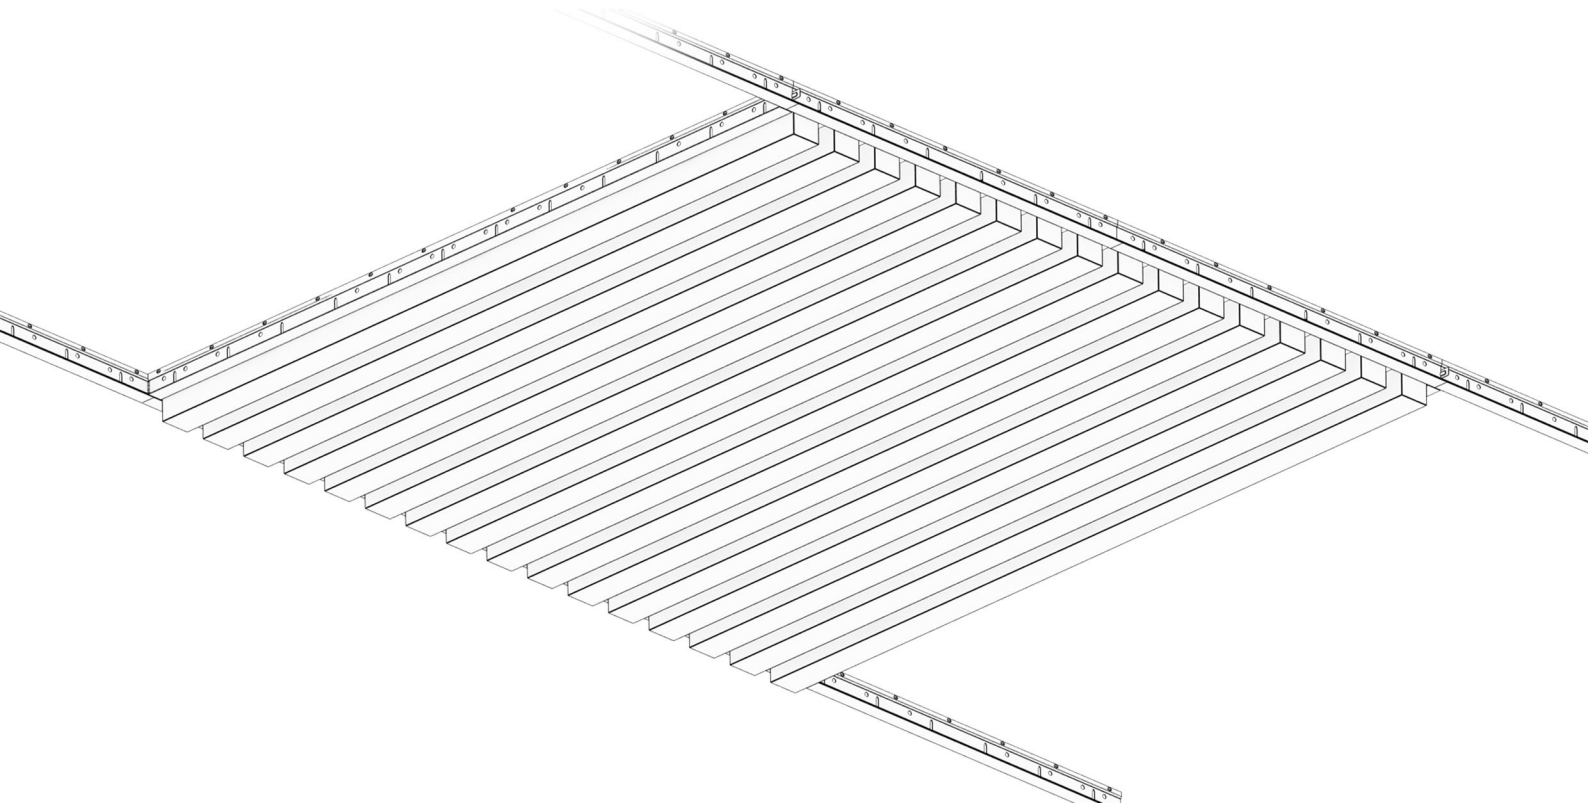


INSTRUCTIONS


# These are your parts.

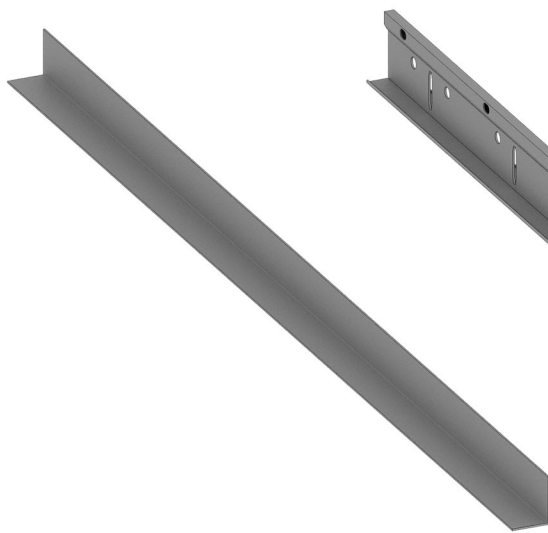

L Profile

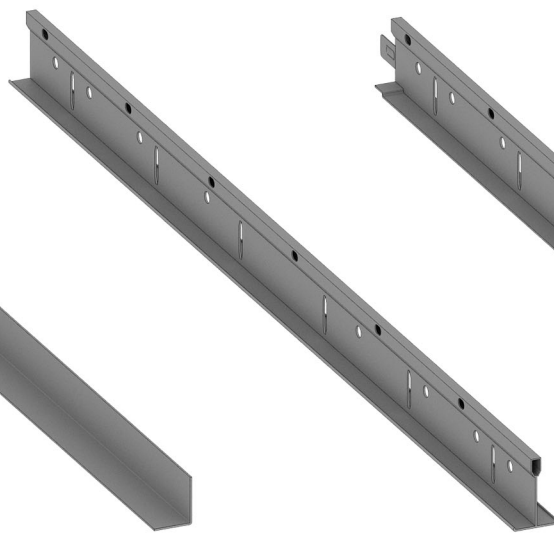


T24 Main Profile

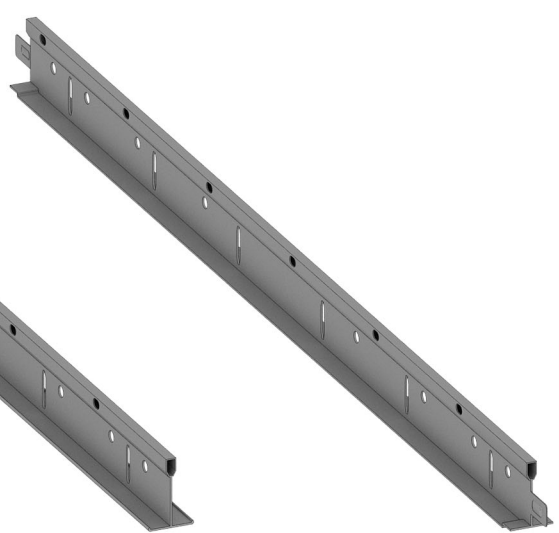


T24 Side Profile



Adjustble Hanger

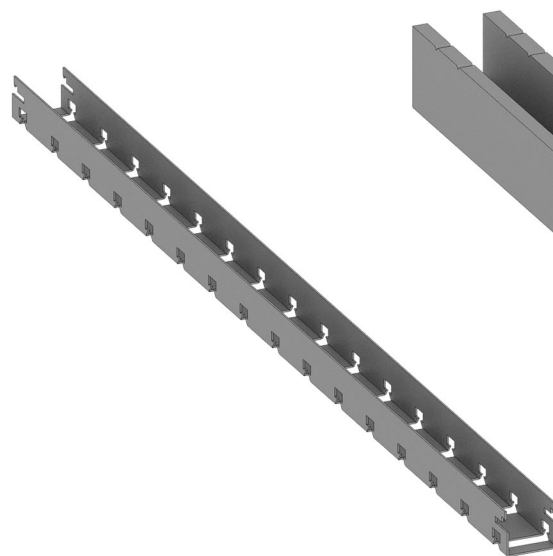


Bridge  
X3 for each tile

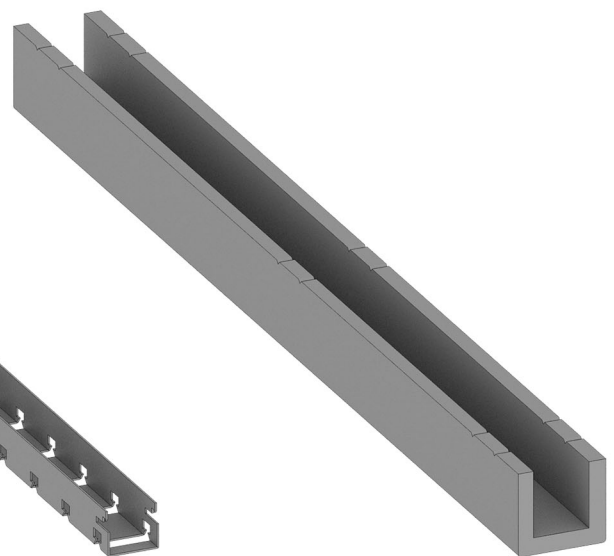


Lamela  
X8 for each tile


- ① **Mark the ceiling line on the wall and screw the L profiles accordingly.**

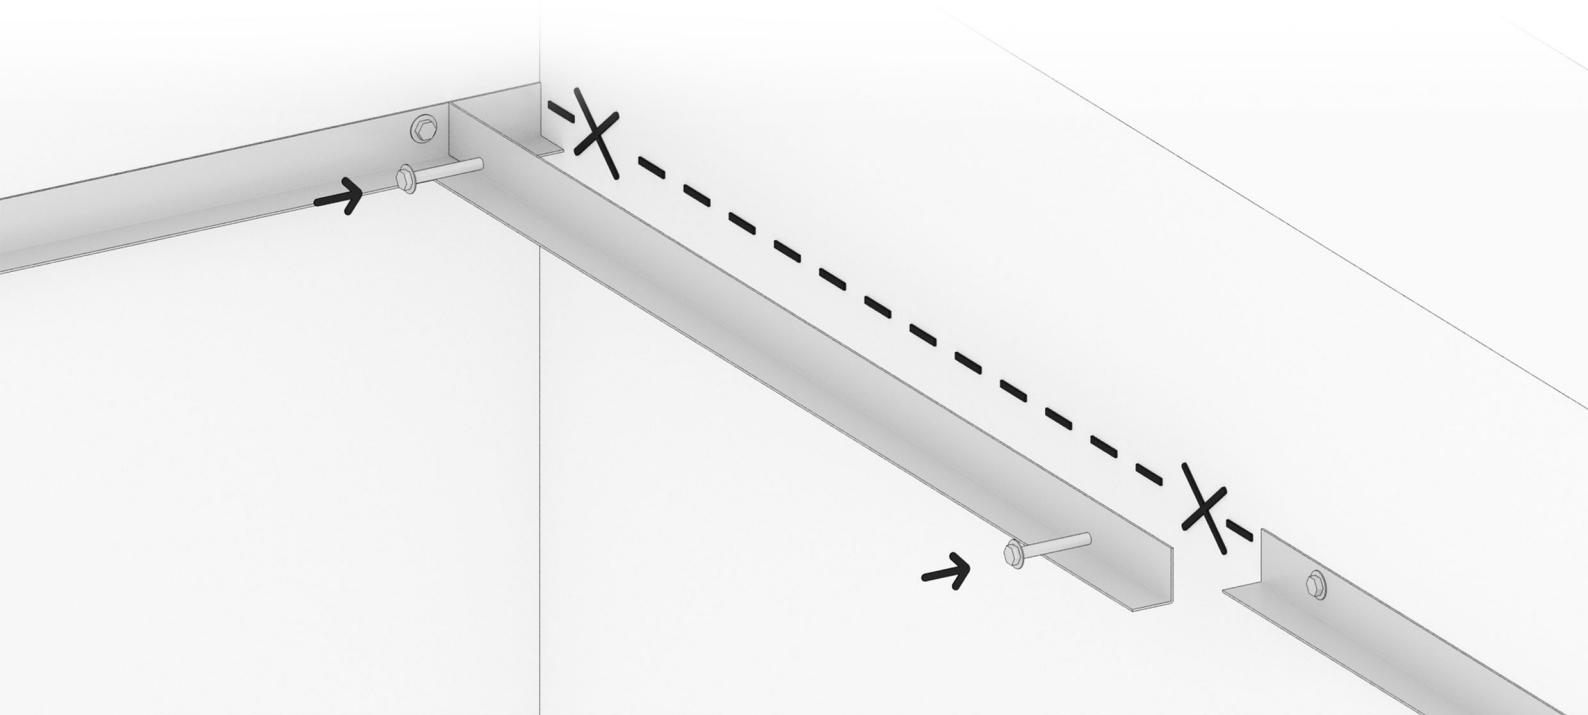


- ② **Screw the hangers of the first row of T24 main profiles while keeping 60 cm from the side wall.**

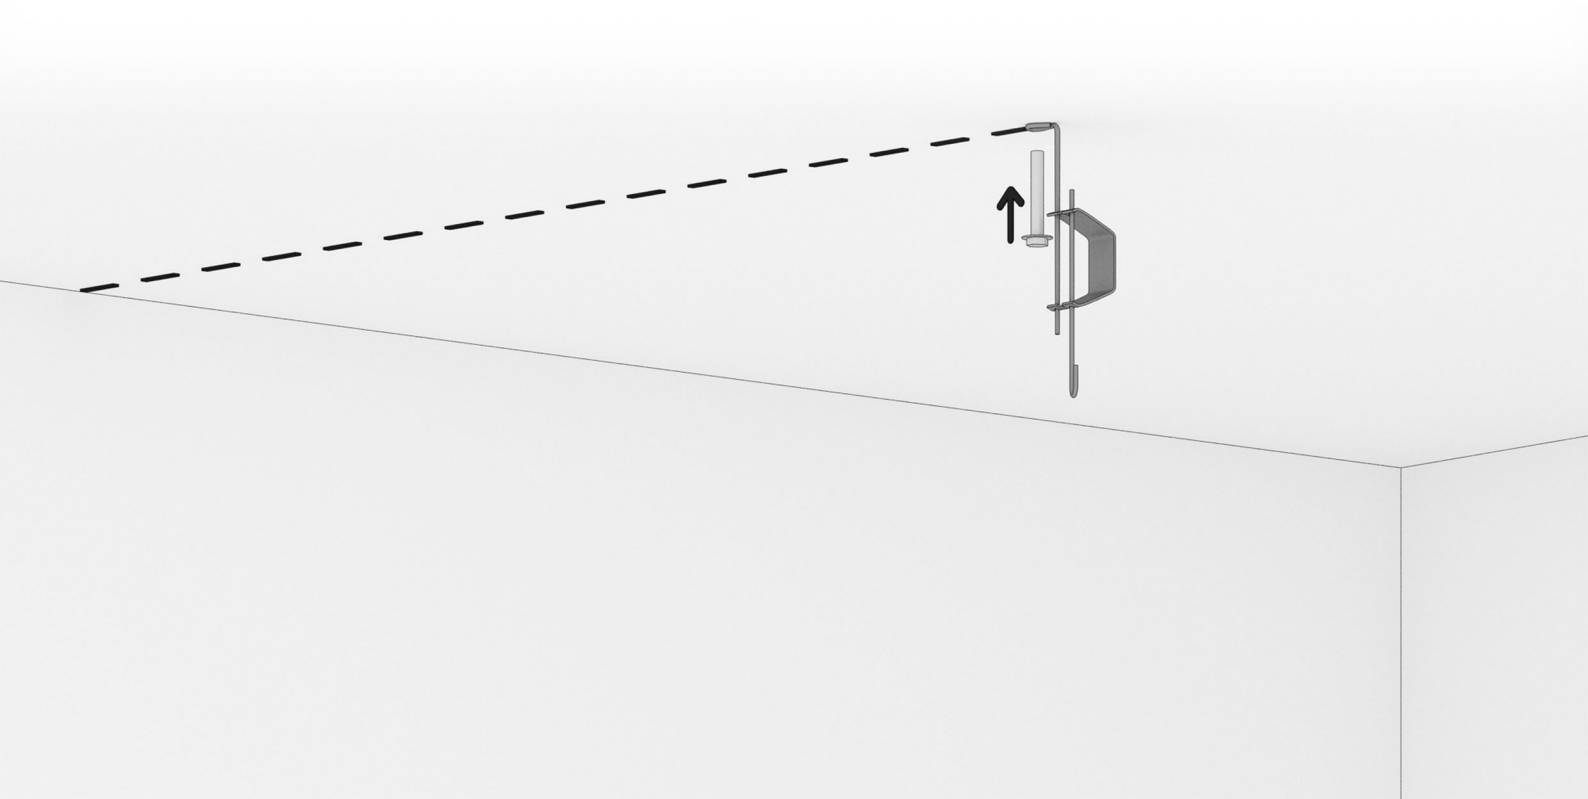

- ③ **Continue the following rows of the main profile keeping 60 cm in between.**

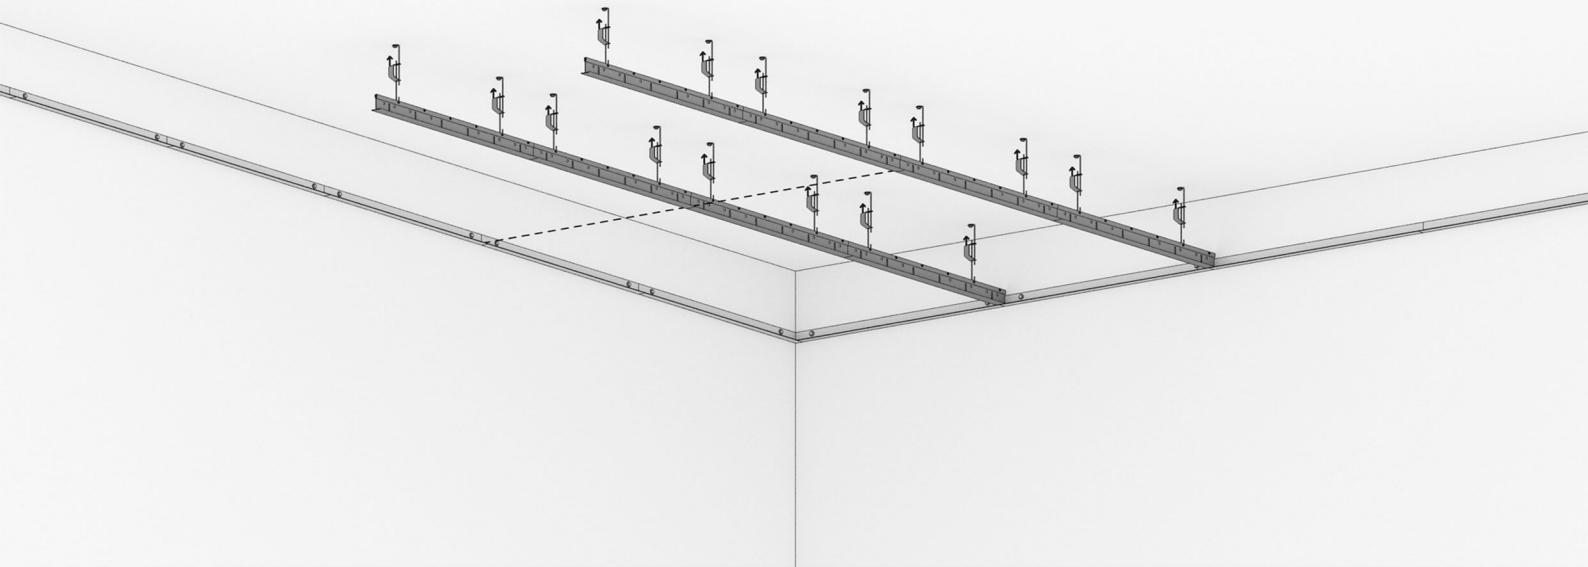


- ④ **Install the T24 side profiles between the mains, keeping 60 cm from the main wall and each other.**

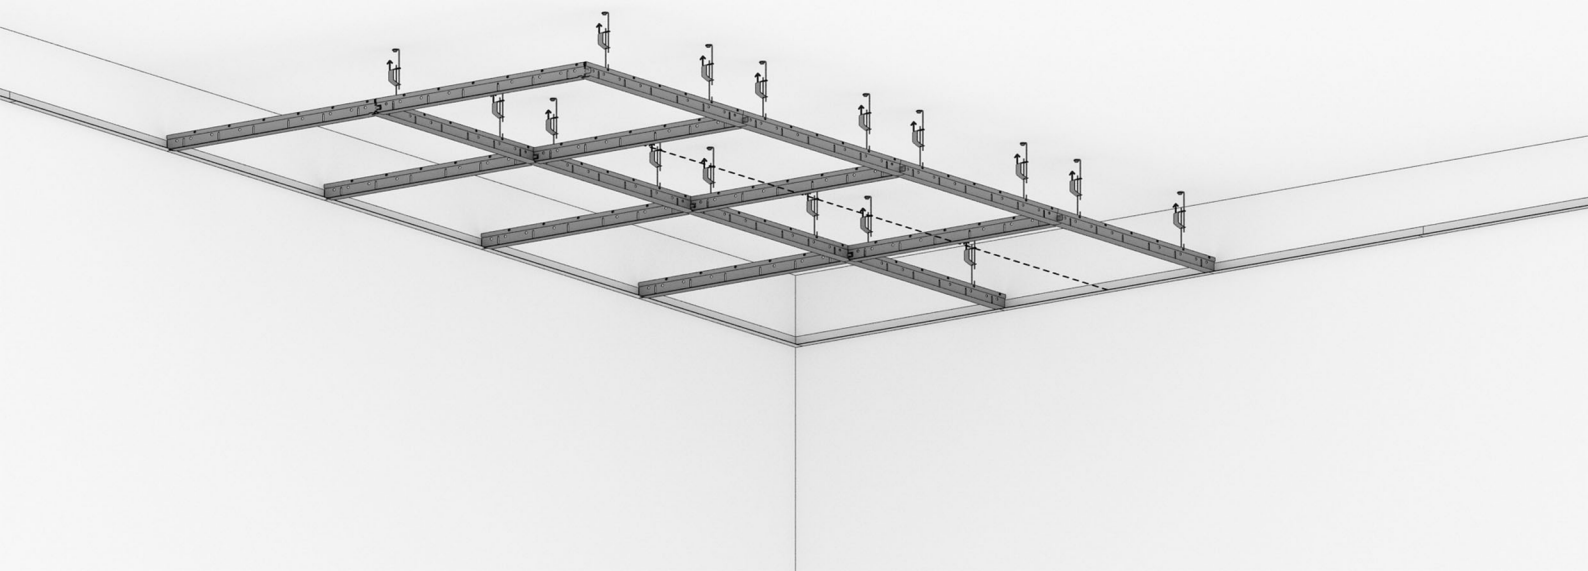





### Bridge

X3 for each tile

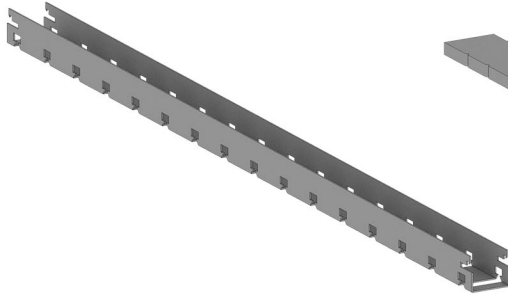


### Lamela

X8 for each tile

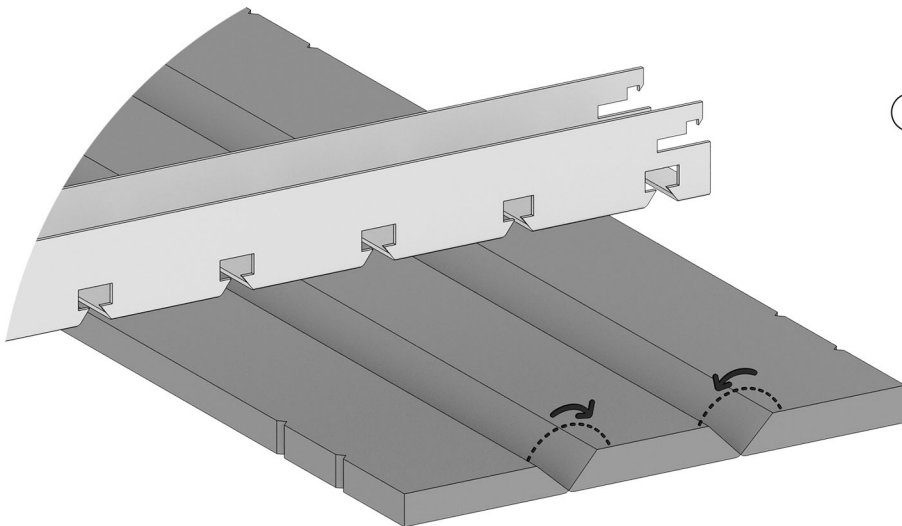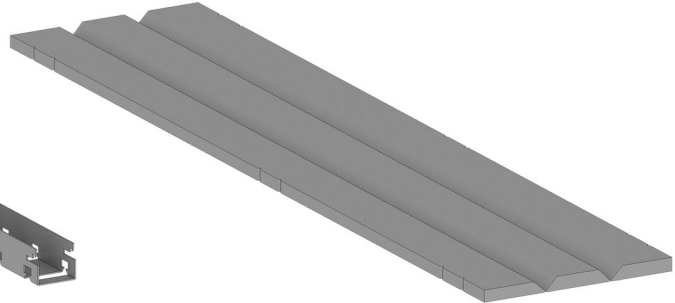

- 5 **Fold into “U” shape each Lamela, 8 per tile.**

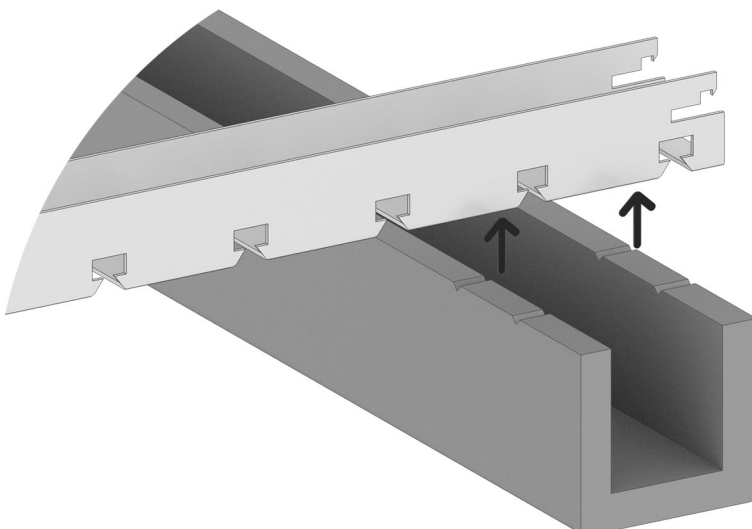

- 6 **Insert 3 bridges into the designate “teeth” of the Lamela.**

- ⑦ **Insert the tiles into the T24 construction the following way.**

